

# PERFORMANCE THAT SEEKS UNREAL

★ WAVEGUIDE & CONNECTORIZED & MMWAVE COMPONENTS ★ RF MICROWAVE & MMWAVE COMPONENTS ★ BARE DIE, SURFACE MOUNT, CONNECTORIZED & MMWAVE COMPONENTS ★



## PRODUCT CATALOG ★ SUMMER 2024



Available with expert technical support and guidance from



**A**t Marki Microwave, we empower our customers to **design faster, simplify production, eliminate complexity, and shatter performance barriers**. We achieve this through intensive research, rigorous product development, and advanced, carefully controlled production.

## PERFORMANCE

By combining time-honored fabrication and assembly techniques with a modern design approach, we can push the technological boundaries of broadband RF and microwave components like never before. With proprietary innovations such as our T3 Mixer® line and high isolation bridge power combiners, and an expanding portfolio of MMIC devices, we seek to provide the most comprehensive selection of high performance microwave components in the world.



## HIGH FREQUENCY OPERATION


High frequencies offer advantages of more contiguous bandwidth supporting high throughput systems, or smaller wavelength signals that enable high resolution imaging and RADAR solutions. Developing products at mmWave and sub-THz frequencies requires attention to the smallest detail and 3D simulations of the entire product, including the environment in which it will be used.

Marki Microwave not only develops MMIC die products but also offers a range of different form factors optimized for high frequency operation.



## PACKAGING


As functions become more complex it is necessary to consider how the role of packaging can affect the design-in-process. We simplify product designs with easy-to-use packages that allow the MMIC design to be realized in both surface mount and connectorized forms, as well as solutions that combine multiple functions into one package. By co-designing the die and package, Marki Microwave ensures optimal performance at the board level. From our chip scale packaging (CSP) that delivers up to 90 GHz in a surface mount footprint to the flexible, multi-octave M-Package designs that enable DC to 120 GHz in a connectorized form, Marki Microwave continues to lead in packaging innovation.

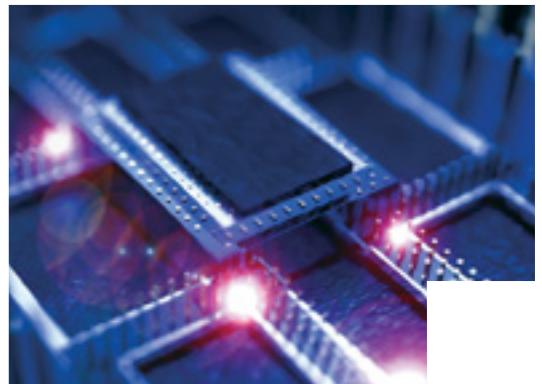

# THE TRUSTED LEADER WHEN PERFORMANCE MATTERS

For over 30 years, we've solved the industry's toughest technical problems by creating a robust portfolio of performance shattering RF and microwave products. Founded in 1991 with the goal of developing the best mixers in the industry, today Marki Microwave is a single source for high performance, broadband microwave technology, supporting multiple form factors including die, surface mount, and connectorized solutions for the entire RF block diagram.

Inventing leading-edge products and focusing on key technical challenges facing the evolving RF and microwave industry have been the cornerstones of our success. From simulation and design to packaging, innovation and creativity are part of our DNA, propelling us forward as we continue to challenge the status quo.

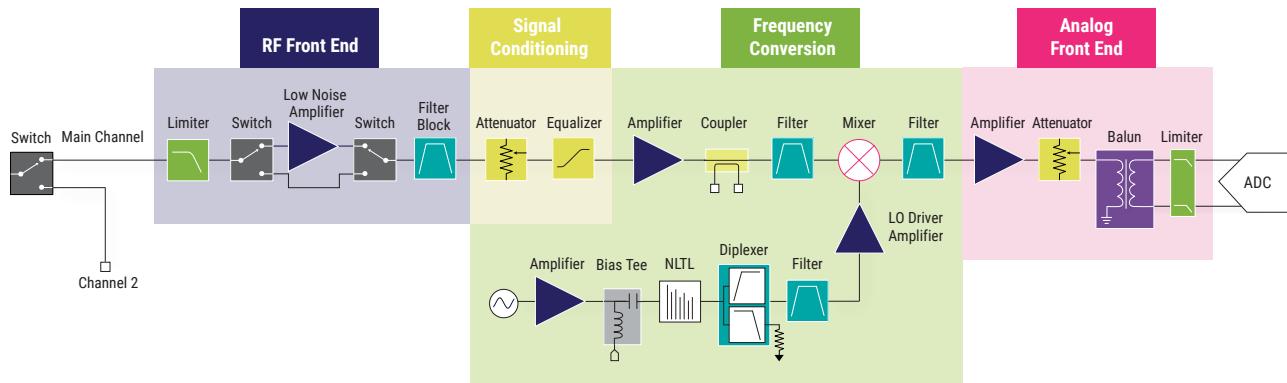

As demands from RF and microwave markets continue to evolve and the supply base consolidates, Marki Microwave remains dedicated to creating a future of limitless possibilities, expanding our catalog and empowering the industry to develop next-generation systems.

# SPACE & HI-REL

Since our inception over 30 years ago, Marki Microwave has developed a long and successful history in space applications. Our capabilities cover both space and Hi-Rel for military applications, supporting die, surface mount, connectorized, and waveguide products.

Most of Marki Microwave's catalog can be upscreened in-house to meet the various qualification requirements of GEO and LEO applications, including:

- Earth Observance
- Communications
- Military
- GPS
- Weather Forecasting
- Telescopes
- Remote Sensing



Our test flows support the overall MIL specification requirements for the various active and passive products Marki Microwave builds. These documents define the general requirements as well as the quality assurance and reliability requirements of such circuits used in military and other high reliability programs. Our qualification plans are designed to meet the following standards:

- MIL-PRF-38534, Class K and H
- MIL-PRF-38535, Class P, N, Y, V, and Q
- NASA PEM-INST-001 (Level 1, 2, and 3)

Marki has successfully qualified the parts below for a combination of 37 die and 6 hybrid surface mount balun requirements to date. Our space heritage demonstrates our commitment to delivering high performance RF solutions for the most demanding applications.

Part Number	Product Description	Package	Screen Level
MM1H-1044LCH-2	MMIC Mixer RF 10 - 44 GHz	Die	H
MM1H-0212HCH-2	MMIC Mixer RF 2 - 12 GHz,	Die	H
MM1H-0312HCH-2	MMIC Mixer RF 3 - 12 GHz	Die	H
MM1H-0320LCH-2	MMIC Mixer RF 3 - 20 GHz	Die	H
MM1H-0626HCH-2	MMIC Mixer RF 6 - 26.5 GHz	Die	H
MM1H-1044HCH-2	MMIC Mixer RF 9 - 44 GHz	Die	H
MM1H-1044LCH-2	MMIC Mixer RF 9 - 44 GHz	Die	H
MM1H-1140HCH-2	MMIC Mixer RF 11 - 40 GHz	Die	H
MM1H-1857LCH-2	MMIC Mixer RF 18 - 57 GHz	Die	H
MM1H-2567LCH-2	MMIC Mixer RF 25 - 67 GHz	Die	H
MM1K-0320LCH-2	MMIC Mixer RF 3 - 20 GHz	Die	K
MM1K-0626HCH-2	MMIC Mixer RF 6 - 26.5 GHz	Die	K
MM1K-0626SCH-2	MMIC Mixer RF 6 - 26.5 GHz	Die	K
MM1K-0832HCH-2	MMIC Mixer RF 8 - 32 GHz	Die	K
MM1K-1044HCH-2	MMIC Mixer RF 9 - 44 GHz	Die	K
MM1K-1044LCH-2	MMIC Mixer RF 9 - 44 GHz	Die	K
MM1K-1857HCH-2	MMIC Mixer RF 18 - 57 GHz	Die	K
MM1K-2567LCH-2	MMIC Mixer RF 25 - 67 GHz	Die	K
MM2H-0530HCH-2	MMIC Mixer RF 5-30 GHz	Die	H
MM2K-0530HCH-2	MMIC Mixer RF 5-30 GHz	Die	K
MM2K-0530LCH-2	MMIC Mixer RF 5-30 GHz	Die	K
MMDK-1030HCH	MMIC Doubler output 10 - 30 GHz	Die	K
MT3HH-0113LCH-2	MMIC Mixer RF 1.5 - 13 GHz	Die	H
BALS-0003SMG	Broadband Balun 500 kHz - 3 GHz	SMT	S
BALS-0006SMG	Broadband Balun 500 kHz - 6 GHz	SMT	S

We currently stock space qualified parts with an optional data pack. These parts ship from stock and provide our customers with shorter lead times and reduced overall program costs.

Space Part Number	COTS Part Number	Description	Package	Class	ECCN
MM1H-1140HCH-2	MM1-1140HCH-2	MMIC Mixer RF 11 - 40 GHz +15 dBm, Chip I2	Die	H	EAR99
MM1K-2567LCH	MM1-2567LCH-2	MMIC Mixer RF 25 - 67 GHz +10 dBm, Chip I2	Die	K	EAR99
MM1K-0626SCH	MM1-0626SCH-2	MMIC Mixer RF 6 - 26.5 GHz +18 dBm	Die	K	EAR99
MM2K-0530LCH-2	MM2-0530LCH-2	MMIC Mixer RF 5-30 GHz +9 to +17 dBm	Die	K	EAR99

In addition to standard qualifications, Marki Microwave can develop custom solutions for nearly any project. Please contact [support@markimicrowave.com](mailto:support@markimicrowave.com) if your needs differ from our standard qualification plans. We are constantly expanding our portfolio of space qualified products to cover the complete RF signal chain.

# TABLE OF CONTENTS

## ■ WAVEGUIDE

Couplers.....	8
Detectors .....	8
Isolators.....	8
Level Set Attenuators.....	8
Multipliers .....	8
Fixed Attenuators .....	9
Power Dividers .....	10
Terminations .....	10
Waveguide Twists .....	10
Waveguide Bends .....	11
Waveguide Straights.....	12

## ■ CONNECTORIZED MODULES

Amplifiers .....	13
Amplifiers, Gain Block and Low Noise.....	13
Baluns .....	13
Pulse Inverters, Broadband, Fast Rise Time.....	14
Bias Tees .....	14
Couplers, Elite Stripline Directional.....	14
Couplers, High Directivity Bridge.....	15
Couplers, Stripline Directional.....	15
Couplers, Low Loss High Power .....	15
Couplers, Dual Directional .....	16
Couplers, Pick-Off Tees .....	16
Couplers, 90° Quadrature Hybrids.....	16
Equalizers, Positive-Slope.....	16
Fixed Filters, Lowpass .....	17
Fixed Filters, Highpass.....	17
Fixed Filters, Bandpass.....	17
Diplexers .....	17
IQ Mixers.....	18
Mixers, Double Balanced .....	18
Mixers, Triple Balanced.....	19
Passive Multipliers & NLTLs .....	19
Active Multipliers .....	19
Power Dividers, High Isolation .....	20
Power Dividers, Wilkinson 1:2 .....	20
Power Dividers, Wilkinson 1:3 .....	20
Power Dividers, Wilkinson 1:4 .....	20
Power Dividers, Resistive 1:2 .....	21
Adapters, High Performance.....	21
Attenuators, Precision-Grade .....	21
DC Blocks, Broadband .....	21
Limiters .....	21
Terminations .....	21
Thumbwheel.....	21

## **SURFACE MOUNT**

Amplifiers, Driver .....	22
Amplifiers, Gain Block and Low Noise .....	22
Attenuators .....	23
Baluns .....	23
Bias Tees .....	24
Coupler, Directional .....	24
Hybrids, 90° Quadrature .....	24
Equalizers, Positive Gain Slope .....	24
Diplexers .....	24
Fixed Filters, Lowpass .....	25
Fixed Filters, Highpass .....	25
Fixed Filters, Absorptive .....	25
Configurable Filters, Tunable .....	25
Fixed Filters, Bandpass .....	26, 27
Limiters .....	27
IQ Mixers .....	27
IQ Mixers, Integrated Drive .....	28
Mixers, Double Balanced .....	28
Mixers, Triple Balanced .....	28
Mixers, Integrated Drive .....	29
Passive Multipliers & NLTs .....	29
Power Dividers, 1:2 .....	29
Switches .....	29

## **BARE DIE**

Amplifiers, Driver .....	30
Amplifiers, Gain Block and Low Noise .....	30
Attenuators .....	31
Baluns .....	31
Diplexers .....	32
Equalizers, Positive Gain Slope .....	32
Fixed Filters, Lowpass .....	32
Fixed Filters, Highpass .....	32
Fixed Filters, Absorptive .....	32
Fixed Filters, Bandpass .....	33
IQ Mixers .....	34
Mixers, Double Balanced .....	34
Mixers, Triple Balanced .....	34
Hybrids, 90° Quadrature .....	35
Limiters .....	35
Passive Multipliers & NLTs .....	35
Power Dividers, 1:2 .....	35

## **SUFFIX/GLOSSARY**

Part Number Decoder .....	36, 37
---------------------------	--------

# WAVEGUIDE

## COUPLERS

Part Number	Band (GHz)	Coupling	Directivity TYP. (dB)	Insertion Loss (dB)	Return Loss (dB)	Waveguide Band	Flange	ECCN
◆ <a href="#">C10-2800WG*</a>	26.5-40	10	40	0.5	30	WR-28	UG-599/U	EAR99
◆ <a href="#">C10-2200WG*</a>	33-50	10	40	0.6	30	WR-22	UG-383/U	EAR99
◆ <a href="#">C10-1900WG*</a>	40-60	10	40	0.7	30	WR-19	UG-383/U	EAR99
◆ <a href="#">C10-1500WG*</a>	50-75	10	40	1.2	30	WR-15	UG-385/U	EAR99
◆ <a href="#">C10-1200WG*</a>	60-90	10	40	1.1	30	WR-12	UG-387/U	EAR99
◆ <a href="#">C10-1000WG*</a>	75-110	10	40	1.25	30	WR-10	UG-387/U	EAR99

## DETECTORS

Part Number	Band (GHz)	Sensitivity (V/mW)	Flatness (dB)	Operating range (dB)	Flange	ECCN
◆ <a href="#">DET-28PP00WG*</a>	26.5-40	1800	+/- 1.5	15 to -40	UG-599/U	EAR99
◆ <a href="#">DET-22PP00WG*</a>	33-50	1500	+/- 1.5	15 to -40	UG-383/U	EAR99
◆ <a href="#">DET-19PP00WG*</a>	40-60	1500	+/- 2.0	15 to -40	UG-383/U	EAR99
◆ <a href="#">DET-15PP00WG*</a>	50-75	1200	+/- 1.5	15 to -40	UG-387/U	EAR99
◆ <a href="#">DET-12PP00WG*</a>	60-90	1000	+/- 1.5	15 to -40	UG-387/U	EAR99
◆ <a href="#">DET-10PP00WG*</a>	75-110	800	+/- 1.5	15 to -40	UG-387/U	EAR99
◆ <a href="#">DET-08PP00WG*</a>	90-140	700	+/- 1.7	15 to -40	UG-387/U	EAR99

## ISOLATORS

Part Number	Band (GHz)	Isolation (dB)	Insertion Loss (dB)	Return Loss	Waveguide Band	Flange	ECCN
◆ <a href="#">ISO27-28F00WG*</a>	26.5-40	27	1	17.7	WR-28	UG-599/U	EAR99
◆ <a href="#">ISO27-22F00WG*</a>	33-50	27	1.3	17.7	WR-22	UG-383/U	EAR99
◆ <a href="#">ISO27-19F00WG*</a>	40-60	27	1.5	17.7	WR-19	UG-383/U	EAR99
◆ <a href="#">ISO27-15F00WG*</a>	50-75	27	1.6	15.5	WR-15	UG-385/U	EAR99
◆ <a href="#">ISO27-12F00WG*</a>	60-90	27	1.7	15.5	WR-12	UG-387/U	EAR99
◆ <a href="#">ISO27-10F00WG*</a>	75-110	27	2	15.5	WR-10	UG-387/U	EAR99

## LEVEL SET ATTENUATORS

Part Number	Band (GHz)	Attenuation Range (dB)	Return Loss (dB)	Flange	ECCN
◆ <a href="#">ATN35-15LS00WG*</a>	50-75	0-35	15	UG-385/U	EAR99
◆ <a href="#">ATN35-12LS00WG*</a>	60-90	0-35	15	UG-387/U	EAR99
◆ <a href="#">ATN35-10LS00WG*</a>	75-110	0-35	15	UG-387/U	EAR99

## MULTIPLIERS

Part Number	Band (GHz)	Output Power dBm	Input Frequency (GHz)	Flange	ECCN
◆ <a href="#">AQA-15F00WG*</a>	50-75	13	12.5-18.75	UG-385/U	EAR99
◆ <a href="#">ASA-12F00WG*</a>	71-86	12	11.83-14.33	UG-387/U	EAR99
◆ <a href="#">ASA-10F00WG*</a>	75-110	10	12.5-18.3	UG-387/U	3A001.b.7.c.3

\*New Release

All electrical specifications given are typical values.  
Visit [markimicrowave.com](http://markimicrowave.com) for more connectorized components.

## FIXED ATTENUATORS

Part Number	Band (GHz)	Attenuation (dB)	Waveguide Band	Flange	ECCN
◆ <a href="#">ATN00-15FH00WG*<sup>1</sup></a>	50-75	0	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN00-15FL00WG*<sup>1</sup></a>	50-75	0	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN03-15FH00WG*<sup>1</sup></a>	50-75	3	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN03-15FL00WG*<sup>1</sup></a>	50-75	3	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN06-15FH00WG*<sup>1</sup></a>	50-75	6	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN06-15FL00WG*<sup>1</sup></a>	50-75	6	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN10-15FH00WG*<sup>1</sup></a>	50-75	10	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN10-15FL00WG*<sup>1</sup></a>	50-75	10	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN15-15FH00WG*<sup>1</sup></a>	50-75	15	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN15-15FL00WG*<sup>1</sup></a>	50-75	15	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN20-15FH00WG*<sup>1</sup></a>	50-75	20	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN20-15FL00WG*<sup>1</sup></a>	50-75	20	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN25-15FH00WG*<sup>1</sup></a>	50-75	25	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN25-15FL00WG*<sup>1</sup></a>	50-75	25	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN30-15FH00WG*<sup>1</sup></a>	50-75	30	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN30-15FL00WG*<sup>1</sup></a>	50-75	30	WR-15	UG-385/U	EAR99
◆ <a href="#">ATN00-12FH00WG*<sup>1</sup></a>	60-90	0	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN00-12FL00WG*<sup>1</sup></a>	60-90	0	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN03-12FH00WG*<sup>1</sup></a>	60-90	3	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN03-12FL00WG*<sup>1</sup></a>	60-90	3	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN06-12FH00WG*<sup>1</sup></a>	60-90	6	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN06-12FL00WG*<sup>1</sup></a>	60-90	6	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN10-12FH00WG*<sup>1</sup></a>	60-90	10	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN10-12FL00WG*<sup>1</sup></a>	60-90	10	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN15-12FH00WG*<sup>1</sup></a>	60-90	15	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN15-12FL00WG*<sup>1</sup></a>	60-90	15	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN20-12FH00WG*<sup>1</sup></a>	60-90	20	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN20-12FL00WG*<sup>1</sup></a>	60-90	20	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN25-12FH00WG*<sup>1</sup></a>	60-90	25	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN25-12FL00WG*<sup>1</sup></a>	60-90	25	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN30-12FH00WG*<sup>1</sup></a>	60-90	30	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN30-12FL00WG*<sup>1</sup></a>	60-90	30	WR-12	UG-387/U	EAR99
◆ <a href="#">ATN00-10FH00WG*<sup>1</sup></a>	75-110	0	WR-10	UG-387/U	EAR99
◆ <a href="#">ATN00-10FL00WG*<sup>1</sup></a>	75-110	0	WR-10	UG-387/U	EAR99
◆ <a href="#">ATN03-10FH00WG*<sup>1</sup></a>	75-110	3	WR-10	UG-387/U	EAR99
◆ <a href="#">ATN03-10FL00WG*<sup>1</sup></a>	75-110	3	WR-10	UG-387/U	EAR99
◆ <a href="#">ATN06-10FH00WG*<sup>1</sup></a>	75-110	6	WR-10	UG-387/U	EAR99
◆ <a href="#">ATN06-10FL00WG*<sup>1</sup></a>	75-110	6	WR-10	UG-387/U	EAR99
◆ <a href="#">ATN10-10FH00WG*<sup>1</sup></a>	75-110	10	WR-10	UG-387/U	EAR99
◆ <a href="#">ATN10-10FL00WG*<sup>1</sup></a>	75-110	10	WR-10	UG-387/U	EAR99
◆ <a href="#">ATN15-10FH00WG*<sup>1</sup></a>	75-110	15	WR-10	UG-387/U	EAR99
◆ <a href="#">ATN15-10FL00WG*<sup>1</sup></a>	75-110	15	WR-10	UG-387/U	EAR99
◆ <a href="#">ATN20-10FH00WG*<sup>1</sup></a>	75-110	20	WR-10	UG-387/U	EAR99
◆ <a href="#">ATN20-10FL00WG*<sup>1</sup></a>	75-110	20	WR-10	UG-387/U	EAR99
◆ <a href="#">ATN25-10FH00WG*<sup>1</sup></a>	75-110	25	WR-10	UG-387/U	EAR99
◆ <a href="#">ATN25-10FL00WG*<sup>1</sup></a>	75-110	25	WR-10	UG-387/U	EAR99
◆ <a href="#">ATN30-10FH00WG*<sup>1</sup></a>	75-110	30	WR-10	UG-387/U	EAR99
◆ <a href="#">ATN30-10FL00WG*<sup>1</sup></a>	75-110	30	WR-10	UG-387/U	EAR99

<sup>1</sup>Low power handles 300 mW, high power handles 3 W with fan cooling

## POWER DIVIDERS

Part Number	Band (GHz)	Insertion Loss (dB)	Isolation (dB)	VSWR Input	VSWR Outputs	Flange	ECCN
◆ <a href="#">PD20-1500WG*</a>	50-75	0.5	20	1.6:1	1.5:1	UG-385/U	EAR99
◆ <a href="#">PD20-1200WG*</a>	60-90	0.5	20	1.6:1	1.5:1	UG-387/U	EAR99
◆ <a href="#">PD20-1000WG*</a>	75-110	0.5	20	1.6:1	1.5:1	UG-387/U	EAR99

## TERMINATIONS

Part Number	Band (GHz)	Return Loss (dB)	Power Handling (W)	Waveguide Band	Flange	ECCN
◆ <a href="#">TW50-28H00WG*</a>	26.5-40	30	7	WR-28	UG-599/U	EAR99
◆ <a href="#">TW50-28L00WG*</a>	26.5-40	32	5	WR-28	UG-599/U	EAR99
◆ <a href="#">TW50-22H00WG*</a>	33-50	30	5	WR-22	UG-383/U	EAR99
◆ <a href="#">TW50-22L00WG*</a>	33-50	32	4	WR-22	UG-383/U	EAR99
◆ <a href="#">TW50-19H00WG*</a>	40-60	30	3	WR-19	UG-383/U	EAR99
◆ <a href="#">TW50-19L00WG*</a>	40-60	32	2	WR-19	UG-383/U	EAR99
◆ <a href="#">TW50-15H00WG*</a>	50-75	28	2	WR-15	UG-385/U	EAR99
◆ <a href="#">TW50-15L00WG*</a>	50-75	30	1	WR-15	UG-385/U	EAR99
◆ <a href="#">TW50-12H00WG*</a>	60-90	28	1.8	WR-12	UG-387/U	EAR99
◆ <a href="#">TW50-12L00WG*</a>	60-90	30	0.9	WR-12	UG-387/U	EAR99
◆ <a href="#">TW50-10H00WG*</a>	75-110	28	1.2	WR-10	UG-387/U	EAR99
◆ <a href="#">TW50-10L00WG*</a>	75-110	30	0.6	WR-10	UG-387/U	EAR99
◆ <a href="#">TW50-08H00WG*</a>	90-140	24	<a href="#">contact support</a>	WR-08	UG-387/U	EAR99
◆ <a href="#">TW50-08L00WG*</a>	90-140	26	<a href="#">contact support</a>	WR-08	UG-387/U	EAR99

## WAVEGUIDE TWISTS

Part Number	Band (GHz)	Twist Angle	Flange	ECCN
◆ <a href="#">WT45-28L00WG*</a>	26.5-40	45°	UG-599/U	EAR99
◆ <a href="#">WT45-28R00WG*</a>	26.5-40	45°	UG-599/U	EAR99
◆ <a href="#">WT90-2800WG*</a>	26.5-40	90°	UG-599/U	EAR99
◆ <a href="#">WT45-22R00WG*</a>	33-50	45°	UG-383/U	EAR99
◆ <a href="#">WT45-22L00WG*</a>	33-50	45°	UG-383/U	EAR99
◆ <a href="#">WT90-2200WG*</a>	33-50	90°	UG-383/U	EAR99
◆ <a href="#">WT90-1900WG*</a>	40-60	90°	UG-383/U	EAR99
◆ <a href="#">WT45-19R00WG*</a>	40-60	45°	UG-383/U	EAR99
◆ <a href="#">WT45-19L00WG*</a>	40-60	45°	UG-383/U	EAR99
◆ <a href="#">WT45-15L00WG*</a>	50-75	45°	UG-385/U	EAR99
◆ <a href="#">WT90-1500WG*</a>	50-75	90°	UG-385/U	EAR99
◆ <a href="#">WT45-15R00WG*</a>	50-75	45°	UG-385/U	EAR99
◆ <a href="#">WT90-1200WG*</a>	60-90	90°	UG-387/U	EAR99
◆ <a href="#">WT45-12R00WG*</a>	60-90	45°	UG-387/U	EAR99
◆ <a href="#">WT45-12L00WG*</a>	60-90	45°	UG-387/U	EAR99
◆ <a href="#">WT45-10R00WG*</a>	75-110	45°	UG-387/U	EAR99
◆ <a href="#">WT90-1000WG*</a>	75-110	90°	UG-387/U	EAR99
◆ <a href="#">WT45-10L00WG*</a>	75-110	45°	UG-387/U	EAR99
◆ <a href="#">WT45-08L00WG*</a>	90-140	45°	UG-387/U	EAR99
◆ <a href="#">WT45-08R00WG*</a>	90-140	45°	UG-387/U	EAR99
◆ <a href="#">WT90-0800WG*</a>	90-140	90°	UG-387/U	EAR99
◆ <a href="#">WT45-06R00WG*</a>	110-170	45°	UG-387/U	EAR99
◆ <a href="#">WT45-06L00WG*</a>	110-170	45°	UG-387/U	EAR99
◆ <a href="#">WT90-0600WG*</a>	110-170	90°	UG-387/U	EAR99

## WAVEGUIDE BENDS

Part Number	Band (GHz)	Bend Angle	Flange	ECCN
◆ <a href="#">WE45-2800WG*</a>	26.5-40	45°	UG-599/U	EAR99
◆ <a href="#">WE90-2800WG*</a>	26.5-40	90°	UG-599/U	EAR99
◆ <a href="#">WH45-2800WG*</a>	26.5-40	45°	UG-599/U	EAR99
◆ <a href="#">WH90-2800WG*</a>	26.5-40	90°	UG-599/U	EAR99
◆ <a href="#">WE45-2200WG*</a>	33-50	45°	UG-383/U	EAR99
◆ <a href="#">WE90-2200WG*</a>	33-50	90°	UG-383/U	EAR99
◆ <a href="#">WH45-2200WG*</a>	33-50	45°	UG-383/U	EAR99
◆ <a href="#">WH90-2200WG*</a>	33-50	90°	UG-383/U	EAR99
◆ <a href="#">WE45-1900WG*</a>	40-60	45°	UG-383/U	EAR99
◆ <a href="#">WE90-1900WG*</a>	40-60	90°	UG-383/U	EAR99
◆ <a href="#">WH45-1900WG*</a>	40-60	45°	UG-383/U	EAR99
◆ <a href="#">WH90-1900WG*</a>	40-60	90°	UG-383/U	EAR99
◆ <a href="#">WE45-1500WG*</a>	50-75	45°	UG-385/U	EAR99
◆ <a href="#">WE90-1500WG*</a>	50-75	90°	UG-385/U	EAR99
◆ <a href="#">WH45-1500WG*</a>	50-75	45°	UG-385/U	EAR99
◆ <a href="#">WH90-1500WG*</a>	50-75	90°	UG-385/U	EAR99
◆ <a href="#">WE45-1200WG*</a>	60-90	45°	UG-387/U	EAR99
◆ <a href="#">WE90-1200WG*</a>	60-90	90°	UG-387/U	EAR99
◆ <a href="#">WH45-1200WG*</a>	60-90	45°	UG-387/U	EAR99
◆ <a href="#">WH90-1200WG*</a>	60-90	90°	UG-387/U	EAR99
◆ <a href="#">WE45-1000WG*</a>	75-110	45°	UG-387/U	EAR99
◆ <a href="#">WE90-1000WG*</a>	75-110	90°	UG-387/U	EAR99
◆ <a href="#">WH45-1000WG*</a>	75-110	45°	UG-387/U	EAR99
◆ <a href="#">WH90-1000WG*</a>	75-110	90°	UG-387/U	EAR99
◆ <a href="#">WE45-0800WG*</a>	90-140	45°	UG-387/U	EAR99
◆ <a href="#">WE90-0800WG*</a>	90-140	90°	UG-387/U	EAR99
◆ <a href="#">WH45-0800WG*</a>	90-140	45°	UG-387/U	EAR99
◆ <a href="#">WH90-0800WG*</a>	90-140	90°	UG-387/U	EAR99
◆ <a href="#">WE45-0600WG*</a>	110-170	45°	UG-387/U	EAR99
◆ <a href="#">WE90-0600WG*</a>	110-170	90°	UG-387/U	EAR99
◆ <a href="#">WH45-0600WG*</a>	110-170	45°	UG-387/U	EAR99
◆ <a href="#">WH90-0600WG*</a>	110-170	90°	UG-387/U	EAR99

\*New Release

All electrical specifications given are typical values.  
Visit [markimicrowave.com](http://markimicrowave.com) for more connectorized components.

**WAVEGUIDE STRAIGHTS**

Part Number	Band (GHz)	Length (inch)	Flange	ECCN
♦ <a href="#"><u>WS-2800100WG*</u></a>	26.5-40	1	UG-599/U	EAR99
♦ <a href="#"><u>WS-2800200WG*</u></a>	26.5-40	2	UG-599/U	EAR99
♦ <a href="#"><u>WS-2800300WG*</u></a>	26.5-40	3	UG-599/U	EAR99
♦ <a href="#"><u>WS-2800600WG*</u></a>	26.5-40	6	UG-599/U	EAR99
♦ <a href="#"><u>WS-2200100WG*</u></a>	33-50	1	UG-383/U	EAR99
♦ <a href="#"><u>WS-220010SWG*</u></a>	33-50	1	UG-599/U	EAR99
♦ <a href="#"><u>WS-2200200WG*</u></a>	33-50	2	UG-383/U	EAR99
♦ <a href="#"><u>WS-220020SWG*</u></a>	33-50	2	UG-599/U	EAR99
♦ <a href="#"><u>WS-2200300WG*</u></a>	33-50	3	UG-383/U	EAR99
♦ <a href="#"><u>WS-220030SWG*</u></a>	33-50	3	UG-599/U	EAR99
♦ <a href="#"><u>WS-2200600WG*</u></a>	33-50	6	UG-383/U	EAR99
♦ <a href="#"><u>WS-220060SWG*</u></a>	33-50	6	UG-599/U	EAR99
♦ <a href="#"><u>WS-1900100WG*</u></a>	40-60	1	UG-383/U	EAR99
♦ <a href="#"><u>WS-190010SWG*</u></a>	40-60	1	UG-599/U	EAR99
♦ <a href="#"><u>WS-1900200WG*</u></a>	40-60	2	UG-383/U	EAR99
♦ <a href="#"><u>WS-190020SWG*</u></a>	40-60	2	UG-599/U	EAR99
♦ <a href="#"><u>WS-1900300WG*</u></a>	40-60	3	UG-383/U	EAR99
♦ <a href="#"><u>WS-190030SWG*</u></a>	40-60	3	UG-599/U	EAR99
♦ <a href="#"><u>WS-1900600WG*</u></a>	40-60	6	UG-383/U	EAR99
♦ <a href="#"><u>WS-190060SWG*</u></a>	40-60	6	UG-599/U	EAR99
♦ <a href="#"><u>WS-1500100WG*</u></a>	50-75	1	UG-385/U	EAR99
♦ <a href="#"><u>WS-1500200WG*</u></a>	50-75	2	UG-385/U	EAR99
♦ <a href="#"><u>WS-1500300WG*</u></a>	50-75	3	UG-385/U	EAR99
♦ <a href="#"><u>WS-1500600WG*</u></a>	50-75	6	UG-385/U	EAR99
♦ <a href="#"><u>WS-1200100WG*</u></a>	60-90	1	UG-387/U	EAR99
♦ <a href="#"><u>WS-1200200WG*</u></a>	60-90	2	UG-387/U	EAR99
♦ <a href="#"><u>WS-1200300WG*</u></a>	60-90	3	UG-387/U	EAR99
♦ <a href="#"><u>WS-1200400WG*</u></a>	60-90	4	UG-387/U	EAR99
♦ <a href="#"><u>WS-1000100WG*</u></a>	75-110	1	UG-387/U	EAR99
♦ <a href="#"><u>WS-1000200WG*</u></a>	75-110	2	UG-387/U	EAR99
♦ <a href="#"><u>WS-1000300WG*</u></a>	75-110	3	UG-387/U	EAR99
♦ <a href="#"><u>WS-1000400WG*</u></a>	75-110	4	UG-387/U	EAR99
♦ <a href="#"><u>WS-0800100WG*</u></a>	90-140	1	UG-387/U	EAR99
♦ <a href="#"><u>WS-0800200WG*</u></a>	90-140	2	UG-387/U	EAR99
♦ <a href="#"><u>WS-0800300WG*</u></a>	90-140	3	UG-387/U	EAR99
♦ <a href="#"><u>WS-0800600WG*</u></a>	90-140	6	UG-387/U	EAR99
♦ <a href="#"><u>WS-0600100WG*</u></a>	110-170	1	UG-387/U	EAR99
♦ <a href="#"><u>WS-0600200WG*</u></a>	110-170	2	UG-387/U	EAR99
♦ <a href="#"><u>WS-0600300WG*</u></a>	110-170	3	UG-387/U	EAR99
♦ <a href="#"><u>WS-0600600WG*</u></a>	110-170	6	UG-387/U	EAR99
♦ <a href="#"><u>WS-0500100WG*</u></a>	140-220	1	UG-387/U	EAR99
♦ <a href="#"><u>WS-0500200WG*</u></a>	140-220	2	UG-387/U	EAR99
♦ <a href="#"><u>WS-0500300WG*</u></a>	140-220	3	UG-387/U	EAR99
♦ <a href="#"><u>WS-0500600WG*</u></a>	140-220	6	UG-387/U	EAR99

# CONNECTORIZED MODULES

## AMPLIFIERS

Part Number	Band (GHz)	Gain (dB)	Psat (dBm)	OIP3 (dBm)	Voltage (V)	Current (mA)	ECCN
<a href="#">ADM3-00001PD</a>	0.0003-18	37	+23	+31	See Datasheet	120, 120, 100	EAR99
<a href="#">ADM1-0026PA</a>	0.005-26.5	12	+20	+25	+3 to +7 VD and -0.3 to 0 VG	165	EAR99
<a href="#">ADM3-0022PA</a>	0.01-22	35	+30	+31	See Datasheet	115, 115, 450	EAR99
<a href="#">APM-7099PA</a>	0.1-20	14	+25	+24	+8 VC and +7 VB	72	EAR99
<a href="#">APM-7098PA</a>	0.1-22	14	+23	+24	+8 VC and +7 VB	44	EAR99
<a href="#">ADM2-0035PA</a>	0.1-35	23	+23	+30	+3 to +7 VD and -0.3 to 0 VG	320	EAR99
<a href="#">AMM-7473PC</a>	0.4-26.5	16	+25	+34	+5 to +7 VD and -0.7 to -0.6 VG	150	EAR99
<a href="#">APM-7516PA</a>	1-22	12.5	+23	+33	+5 VC and +5 VB	106	EAR99
<a href="#">APM-6849PA</a>	2-30	11	+21	+21	+7 VC and +7 VB	21	EAR99
<a href="#">ADM1-8007PC</a>	2-40	22	+22	+30	+3 to +6 VD and +3 to +6VG	213	EAR99
<a href="#">AMM-7199UC</a>	11-38	20.5	+21	+31	+3 to +4 VD and -0.6 to -0.4 VG	180	EAR99
<a href="#">AMM-7200UC</a>	12-46	18	+21.5	+29	+3 to +4 VD and -0.6 to -0.4 VG	180	EAR99
<a href="#">AMM-6702(UC/UC5)</a>	20-55	24	+21	+27	+3 to +4 VD and -0.6 to -0.4 VG	180/230	EAR99
<a href="#">AMM-8211UC5</a>	22-57	13	+21	+27	+3.5 to +5.5 VB	175	EAR99
<a href="#">AMM-7203UC</a>	30-60	11.5	+16	+21	+1.5 to +3 VD and -0.6 to -0.4 VG	80	EAR99
<a href="#">A-3567UC</a>	35-67	18	+20	+26	+3 to +4 VD and -0.6 to -0.4 VG	300	EAR99
<a href="#">AMM-0001M</a>	45-95	11	+18	-	+1.5 to 4V VD and -1.5V to 0V VG	350	3A001.b.4.e.2

## AMPLIFIERS, Gain Block & Low Noise

Part Number	Band (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	Voltage (V)	Current (mA)	ECCN
<a href="#">ADM-8344PC</a>	DC-18	18	1.4	+18	+27	+5 VD	103	EAR99
<a href="#">ADM-8558PC</a>	DC-20	15	2.2	+14	+23	+6 VD	50	EAR99
<a href="#">ADM-8622PC</a>	0.0003-10	15	2.1	+13	+27	+3.3 VD	42	EAR99
<a href="#">ADM1-8096PC</a>	0.09-6	22.5	1.5	+23	+35	+5 VD	84	EAR99
<a href="#">ADM1-8095PC</a>	0.09-10	18	1.6	+18.5	+32	+5 VD	57	EAR99
<a href="#">ADM-8624PC</a>	0.2-20	10.5	3	+13.5	+26	+5 VD	40	EAR99
<a href="#">ADM-8556PC</a>	6-20	23	1.7	+17	+26	+3 VD	67	EAR99

## BALUNS

Part Number	Band (GHz)	Amp Bal (dB)	Phase Bal (°)	Isolation (dB)	Turns Ratio	Total Insertion Loss as a Mode Converter (dB)	ECCN
<a href="#">BAL-0003</a>	0.0002-3	0.05	1	8	1:2	4	EAR99
<a href="#">BALH-0003</a>	0.0002-3	0.1	1	7	1:1	1.5	EAR99
<a href="#">BAL-0006</a>	0.0002-6	0.05	1	9	1:2	4.5	EAR99
<a href="#">BALH-0006</a>	0.0002-6	0.1	1	8	1:1	2.5	EAR99
<a href="#">BAL-0010</a>	0.0002-10	0.2	2	9	1:2	5	EAR99
<a href="#">BALH-0010</a>	0.0002-10	0.2	2	8	1:1	2.5	EAR99
<a href="#">BAL-0106</a>	1.2-6	0.1	2	6	1:2	0.6	EAR99
<a href="#">BAL-0212</a>	2.6-12	0.1	2	6	1:2	1	EAR99
<a href="#">BAL-0520</a>	5-20	0.2	3	6	1:2	1.5	EAR99
<a href="#">EBAL-0026</a>	0.01-26	1.0	1	3	1:2	3	EAR99
<a href="#">BAL-0026</a>	0.0003-26.5	0.5	3	24	1:2	2.5	EAR99
<a href="#">BAL-0036</a>	0.0003-36	0.5	3	24	1:2	3	EAR99
<a href="#">EBAL-0040</a>	0.01-40	0.1	2	5	1:2	3	EAR99
<a href="#">BAL-0050</a>	0.0003-50	0.7	4	25	1:2	7	EAR99
<a href="#">EBAL-0050</a>	0.01-50	0.2	3	5	1:2	4	EAR99
<a href="#">BAL-0067</a>	0.0003-67	0.7	4	25	1:2	8.5	EAR99
<a href="#">EBAL-0067</a>	0.01-67	0.2	2	5	1:2	4	EAR99

**PULSE INVERTERS, Broadband, Fast Rise Time**

Part Number	Band (GHz)	Loss (dB)	Rise/Fall Time (ps)	ECCN
<a href="#">INV-0026</a>	0.0001-26.5	2	13	EAR99
<a href="#">INV-0040</a>	0.0001-40	2.5	13	EAR99
<a href="#">INV-0065</a>	0.0001-65	5	12	EAR99

**BIAS TEES**

Part Number	Band (GHz)	DC Voltage (V)	DC Current (A)	Insertion Loss (dB)	ECCN
<a href="#">BT-0018</a>	0.00004-18	30	0.5	0.6	EAR99
<a href="#">BTN1-0018</a>	0.0005-18	50	1	0.7	EAR99
<a href="#">BTN2-0018</a>	0.003-18	50	2	0.7	EAR99
<a href="#">BT-0025</a>	0.00004-25	30	0.5	0.8	EAR99
<a href="#">BT-0026</a>	0.01-26.5	30	0.5	0.8	EAR99
<a href="#">BT1-0026</a>	0.0002-26.5	50	1	1	EAR99
<a href="#">BT2-0026</a>	0.0002-26.5	50	2	1	EAR99
<a href="#">BTN1-0026</a>	0.0005-26.5	50	1	1	EAR99
<a href="#">BTN2-0026</a>	0.003-26.5	50	2	1	EAR99
<a href="#">BT-0040</a>	0.000004-40	30	0.5	1.5	EAR99
<a href="#">BTN-0040</a>	0.00004-40	30	0.5	1.5	EAR99
<a href="#">BT1-0040</a>	0.0002-40	50	1	1.5	EAR99
<a href="#">BT2-0040</a>	0.0002-40	50	2	1.5	EAR99
<a href="#">BTN1-0040</a>	0.0005-40	50	1	1.5	EAR99
<a href="#">BTN2-0040</a>	0.003-40	50	2	1.5	EAR99
<a href="#">BT-0050</a>	0.0002-50	30	0.5	1.8	EAR99
<a href="#">BTN-0050</a>	0.0002-50	30	0.5	1.8	EAR99
<a href="#">BT1-0050</a>	0.0002-50	50	1	1.5	EAR99
<a href="#">BT2-0050</a>	0.0002-50	50	2	1.5	EAR99
<a href="#">BTN1-0050</a>	0.0005-50	50	1	1.5	EAR99
<a href="#">BTN2-0050</a>	0.003-50	50	2	1.5	EAR99
<a href="#">BT-0065</a>	0.000004-65	30	0.5	1.8	EAR99
<a href="#">BTN-0065</a>	0.00004-65	30	0.5	2.0	EAR99

**COUPLERS, Elite Stripline Directional**

Part Number	Band (GHz)	Coupling (dB)	IL Corrected Directivity (dB)	Flatness (dB)	VSWR	ECCN
<a href="#">CE10-0R620T</a>	0.6-20	10	27	±0.2	1.07	EAR99
<a href="#">CE10-0R640(T)</a>	0.6-40	10	24/22	±0.2	1.07/1.08	EAR99
<a href="#">CE10-1R520(T)</a>	1.5-20	10	32	±0.25	1.07	EAR99
<a href="#">CE10-1R540(T)</a>	1.5-40	10	26/22	±0.25	1.07	EAR99
<a href="#">CE13-0220T</a>	2-20	13	30	±0.15	1.07	EAR99
<a href="#">CE13-0240(T)</a>	2-40	13	29/27	±0.15	1.07/1.08	EAR99
<a href="#">CE16-0220T</a>	2-20	16	32	±0.1	1.07	EAR99
<a href="#">CE16-0240(T)</a>	2-40	16	30/29	±0.1	1.07	EAR99
<a href="#">CE20-0R620T</a>	0.6-20	20	26	±0.15	1.07	EAR99
<a href="#">CE20-1R640(T)</a>	0.6-40	20	27/24	±0.15	1.07	EAR99
<a href="#">CE20-0220T</a>	2-20	20	30	±0.1	1.07	EAR99
<a href="#">CE20-0R240(T)</a>	2-40	20	33/28	±0.1	1.05/1.07	EAR99

## COUPLERS, High Directivity Bridge

Part Number	Band (GHz)	Coupling (dB)	Directivity (dB)	VSWR	ECCN
<a href="#">CBR16-0003</a>	0.0002-3	16	40	1.1	EAR99
<a href="#">CBR16-0006</a>	0.0002-6	16	38	1.15	EAR99
<a href="#">CBR16-0012</a>	0.0002-12	16	32	1.25	EAR99
<a href="#">CBR17-0026</a>	0.0002-26	17	23	1.22	EAR99

## COUPLERS, stripline Directional

Part Number	Band (GHz)	Coupling (dB)	Directivity (dB)	Flatness (dB)	VSWR	ECCN
<a href="#">C09-0R412</a>	0.45-12	9	22	±0.7	1.15	EAR99
<a href="#">C09-0R418</a>	0.45-18	9	22	±0.7	1.15	EAR99
<a href="#">C09-0R426</a>	0.45-26.5	9	22	±0.7	1.15	EAR99
<a href="#">C09-0R430</a>	0.45-30	9	20	±0.7	1.15	EAR99
<a href="#">C20-0R612</a>	0.6-12	20	22	±0.6	1.2	EAR99
<a href="#">C10-0116</a>	1-16	10	20	±0.5	1.15	EAR99
<a href="#">C20-0116</a>	1-16	20	20	±0.6	1.15	EAR99
<a href="#">C20-0R518</a>	0.5-18	20	22	±0.75	1.2	EAR99
<a href="#">C20-0R520</a>	0.5-20	20	22	±0.75	1.2	EAR99
<a href="#">C13-0126</a>	1-26.5	13	20	±0.6	1.15	EAR99
<a href="#">C16-1R718</a>	1.7-18	16	20	±0.3	1.15	EAR99
<a href="#">C16-1R726</a>	1.7-26.5	16	20	±0.4	1.15	EAR99
<a href="#">C10-0226</a>	2-26.5	10	22	±0.6	1.15	EAR99
<a href="#">C20-0226</a>	2-26.5	20	22	±0.75	1.25	EAR99
<a href="#">C13-0140</a>	1-40	13	16	±0.1	1.2	EAR99
<a href="#">C20-0240</a>	2-40	20	17	±0.75	1.3	EAR99
<a href="#">C13-0150</a>	1-50	13	16	±0.75	1.2	EAR99
<a href="#">C10-0450</a>	4-50	10	15	±0.5	1.35	EAR99
<a href="#">C10-0667</a>	6-67	10	17	±0.8	1.2	EAR99
<a href="#">C16-0667</a>	6-67	16	17	±0.9	1.25	EAR99
<a href="#">C20-0667</a>	6-67	20	17	±0.8	1.25	EAR99
<a href="#">MC10-25110M2</a>	25-110	10	19.5	+0.2	1.43	EAR99

## COUPLERS, Low Loss High Power

Part Number	Band (GHz)	Coupling (dB)	Directivity (dB)	Loss (dB)	Average Power Handling (W)	ECCN
<a href="#">C17-0R506</a>	0.5-6	17	20	0.4	120	EAR99
<a href="#">C17-0R512</a>	0.5-12	17	20	0.65	80	EAR99
<a href="#">C17-0R518</a>	0.5-18	17	20	1	60	EAR99
<a href="#">CA-18</a>	DC-18	> 30	22	0.35	200	EAR99
<a href="#">CA-26</a>	DC-26.5	> 27	24	0.35	50	EAR99
<a href="#">CA-40</a>	DC-40	> 27	24	0.5	20	EAR99
<a href="#">CA-50</a>	DC-50	> 27	24	0.5	15	EAR99
<a href="#">C-0250</a>	2-50	12	15	0.7	10	EAR99
<a href="#">C-0265</a>	2-65	12	15	0.7	10	EAR99

### \*New Release

All electrical specifications given are typical values.

Visit [markimicrowave.com](http://markimicrowave.com) for more connectorized components.

**COUPLERS, Dual Directional**

Part Number	Band (GHz)	Coupling (dB)	Directivity (dB)	Flatness (dB)	VSWR	ECCN
CD10-0106	0.7-6.3	10	25	±0.6	1.14	EAR99
CD10-0114	0.7-14.7	10	23	±0.6	1.17	EAR99

**COUPLERS, Pick-Off Tees**

Part Number	Band (GHz)	Pick-Off Loss (dB)	Insertion Loss (dB)	ECCN
PT-0020	DC-20	16	2	EAR99
PT-0030(A)	DC-30	16	2	EAR99

**COUPLERS, 90° Quadrature Hybrids**

Part Number	Band (GHz)	Amp Bal (dB)	Phase Bal (°)	Excess Loss (dB)	Isolation (dB)	ECCN
QH-0R518	0.5-18	±0.5	±3	1.5	20	EAR99
QH-0R71R3	0.65-1.3	±0.3	±3	0.5	16	EAR99
QH-0R714	0.7-14.5	±0.2	±2	1.2	22	EAR99
MQS-0209UB	2-9	±0.5	±3	2	16	EAR99
MQS-0218UA	2-18	±1	±3	1.4	17	EAR99
QH-0226	2-26.5	±0.25	±2	2	22	EAR99
MQH-2R58R5UB	2.5-8.5	±0.4	±3	2	23	EAR99
MQH-3R510UB	3.5-10	±0.4	±1.5	1.8	25	EAR99
MQS-0418UA	4-18	±0.4	±0.5	1.5	20	EAR99
QH-0440	4-40	±0.4	±5	2	18	EAR99
MQH-0517UB	5-17	±0.5	±6	1.6	23	EAR99
QH-0550	5-50	±0.6	±5	1	22	EAR99
QH-0867	8-67	±0.6	±6	1.2	18	EAR99
MQH-40110M2	40-110	1	5	2.5	18	EAR99

**EQUALIZERS, Positive-Slope**

Part Number	Band (GHz)	Loss at DC (dB)	Typ Return Loss (dB)	ECCN
EQX-26	DC-26	3, 6	21, 15	EAR99
EQX-40	DC-40	3, 6	18	EAR99
MEQX-26AS	DC-26.5	3, 6, 10	18, 20, 20	EAR99
MEQ10-50AU	DC-50	10	15	EAR99

**\*New Release**

All electrical specifications given are typical values.  
Visit [markimicrowave.com](http://markimicrowave.com) for more connectorized components.

## **FIXED FILTERS: Lowpass, Highpass, Bandpass**

The filters below are a small sample of Marki Microwave's extensive portfolio. Visit [markimicrowave.com](http://markimicrowave.com) for the full catalog of filters.

### **LOWPASS**

Part Number	3dB Cutoff (GHz)	Passband Insertion Loss (dB)	Passband Return Loss (dB)	Frequency @ 50 dB Supp (GHz)	ECCN
<a href="#">FLP-0490</a>	4.9	0.6	30	9.3	EAR99
<a href="#">FLP-2650</a>	26.5	1.5	15	36.5	EAR99
<a href="#">FLP-5000</a>	50	2	15	62	EAR99

### **HIGHPASS**

Part Number	Cutoff (GHz)	30dB Rejection Freq (GHz)	50dB Rejection Freq (GHz)	80dB Rejection Freq (GHz)	ECCN
<a href="#">FH-1700</a>	17	14	11.5	6	EAR99
<a href="#">FH-2600</a>	26	21.5	18	11	EAR99
<a href="#">FH-5500</a>	55	51	45	35	EAR99

### **BANDPASS**

Part Number	Center Freq (GHz)	Low Freq 1dB Cutoff (GHz)	High Freq 1dB Cutoff (GHz)	Insertion Loss @ Center Freq (GHz)	ECCN
<a href="#">FB-0905</a>	9.05	8.45	9.65	3.00	EAR99
<a href="#">MFB-3475U</a>	34.75	28.90	39.40	2.80	EAR99
<a href="#">FB-4000</a>	40.00	34.40	45.60	3.00	EAR99
<a href="#">MFBC-00017M</a>	42.00	34.50	49.50	2.00	EAR99
<a href="#">MFBC-00008M</a>	44.50	36.70	51.10	2.15	EAR99
<a href="#">MFBC-00018M</a>	53.75	44.50	62.50	2.15	EAR99
<a href="#">MFBC-00009M</a>	55.60	46.50	63.50	2.25	EAR99
<a href="#">MFBC-00019M</a>	70.00	58.30	77.70	2.85	EAR99
<a href="#">MFBC-00020M</a>	93.50	77.35	107.80	3.60	EAR99

### **DIPLEXERS**

Part Number	Passband Low (GHz)	Passband High (GHz)	Isolation (dB)	ECCN
<a href="#">MDPX-0305</a>	DC-3	5-26.5	47	EAR99
<a href="#">MDPX-0407</a>	DC-4	7-26.5	38	EAR99
<a href="#">MDPX-0609</a>	DC-6	9-26.5	58	EAR99

#### **\*New Release**

All electrical specifications given are typical values.  
Visit [markimicrowave.com](http://markimicrowave.com) for more connectorized components.

**IQ MIXERS**

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	Image Rej (dBc)	L-R Isolation (dB)	ECCN
<a href="#">MMIQ-0205HXA</a>	1.75-5	DC-2	8	32	61	EAR99
MMIQ-0218(L/H)XPC	2-18	DC-3	8/7.5	27/35	58/53	EAR99
MMIQ-0416(L/H)S	4-16	DC-6	9	28/29	58/59	EAR99
MMIQ-0520(L/H)S	5-20	DC-6	9	35	46	EAR99
MMIQ-0626(L/H)S	6-26	DC-6	9	35	41	EAR99
<a href="#">MMIQ-1037H</a>	10-37	DC-12	9	25	47	EAR99
MMIQ-1040(L/S)S	10-40	DC-12	9	25	47/44	EAR99
MMIQ-1865(L/H/S)UB	18-65	DC-23	9	35	49/48/50	EAR99
<a href="#">MMIQ-4067LU</a>	40-67	DC-20	9	35	33	EAR99
MMIQ-40100(L/H)M	40-100	DC-20	10	30	see datasheet	EAR99
<a href="#">MMIQ-30120HM<sup>1</sup></a>	30-120	DC-30	8.5	27	40	EAR99

<sup>1</sup>Differential IF IQ Mixer**MIXERS, Double Balanced**

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	IIP3 (dBm)	LO Drive (dBm)	ECCN
<a href="#">MM1-0115HS</a>	1-15	DC-2.5	7.5	+21	+17	EAR99
MM1-0212(L/H/S)S	2-12	DC-3	8/8.5/8.5	+13/+23/+26	+9/+15/+20	EAR99
MM1-0222(L/H)S	2-22	DC-3.5	8.5	+11.5/+20	+9/+15	EAR99
<a href="#">MM1-0312(H/S)S</a>	3-12	DC-4.5	7.5	+19/+24	+15/+20	EAR99
MM1-0320(L/H)S	3-20	DC-4	8	+10/+20	+7/+15	EAR99
MM1-0330(H/T)S	3-30	DC-5	7/9	+21/+32	+19/+23	EAR99
<a href="#">MM1-0424SS</a>	4.5-24	DC-4	8	+25	+20	EAR99
MM1-0626(H/S)S	6-26.5	DC-9	7.5/8	+21/+25	+15/+20	EAR99
MM1-0832(L/H)S	8-32	DC-12	8/7.6	+14/+23	+9/+15	EAR99
MM1-1044(L/H)S	10-44	DC-14	7.6	+13/+22	+9/+15	EAR99
<a href="#">MM1-1140HS</a>	11-40	DC-12	8	+21	+15	EAR99
<a href="#">MM1-1240SS</a>	12-40	DC-12	8	+25	+20	EAR99
MM1-1467(L/H)S	14-67	DC-21	7	+12/+17.5	+11/+15	EAR99
MM1-1850(H/S)S	18-50	DC-20	8/8.5	+21/+25	+15/+20	EAR99
MM1-1857(L/H)S	18-57	DC-21	8/7.5	+13/+20	+9/+13	EAR99
<a href="#">MM1-2567LS</a>	25-67	DC-30	9	+9	+13	EAR99
<a href="#">MM1-30100LM</a>	30-100	DC-20	8.5	see datasheet	+14	EAR99
<a href="#">MMH-35120HM<sup>1</sup></a>	35-120, 12-40	DC-14	18	+7	+15	3A001.b.7.c.1

<sup>1</sup>Harmonic Mixer**\*New Release**

All electrical specifications given are typical values.

Visit markimicrowave.com for more connectorized components.

## MIXERS, Triple Balanced

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	IIP3 (dBm)	LO Drive (dBm)	ECCN
<a href="#">MT3A-0113HPA<sup>1</sup></a>	1-13	0.5-8.5	9.5	+28	+12	EAR99
<a href="#">MT3L-0113HS</a>	1.5-13	0.25-5	8.5	+31	+20	EAR99
MT3H-0113(L/H)S	1.5-13	0.8-8.5	8/8.5	+20/+28	+15/+20	EAR99
<a href="#">T3-18GLS</a>	0.01-18	0.001-10	7.5	+25	+20	EAR99
<a href="#">T3H-18GLS</a>	0.01-18	0.01-18	9.5	+30	+20	EAR99
<a href="#">T3-20GLS</a>	0.01-20	0.001-10	7.5	+30	+20	EAR99
T3H-20G(L/I)S	0.01-20	0.01-20	9.5	+30	+20	EAR99
<a href="#">T3-0838GLN</a>	8-38	0.01-10	8	+30	+20	EAR99
<a href="#">T3-1040GLN</a>	10-40	1-18	8	+25	+20	EAR99
MM2-0530(L/H)S	5-30	2-20	10/9	+15/+21	+15/+20	EAR99

<sup>1</sup>Integrated low phase noise driver amplifier

## PASSIVE MULTIPLIERS & NON LINEAR TRANSMISSION LINES

Part Number	Type	Input (GHz)	Output (GHz)	1F Suppression (dBc)	3F Suppression (dBc)	ECCN
<a href="#">MMD-0415HS</a>	Doubler	2-7.5	4-15	27	36	EAR99
MMD-1030(L/H)S	Doubler	5-15	10-30	38/41	46/51	EAR99
<a href="#">MMD-1250HU</a>	Doubler	6-25	12-50	32	40	EAR99
<a href="#">MMD-1648LS</a>	Doubler	8-24	16-48	44	69	EAR99
MMD-2060(L/H)U	Doubler	10-30	20-60	37/38	41/40	EAR99
<a href="#">MMD-20100HM</a>	Doubler	10-50	20-100	24.5	33	3A001.b.7.b.1
<a href="#">MMD-3567LU</a>	Doubler	17.5-33.5	35-67	38	44	EAR99
<a href="#">MMD-3580LU-KW</a>	Doubler	17.5-40	35-80	38	44	EAR99
<a href="#">MMD-40120HM</a>	Doubler	20-60	40-120	30	40	3A001.b.7.b.1
<a href="#">MMQ-40125HM</a>	Quadrupler	10-31.25	40-125	19	12	3A001.b.7.b.1
<a href="#">NLTL-6273S</a>	Comb Generator	0.7-5	0.7-40	-	-	EAR99
NLTL-6275U/USW	Comb Generator	3-15	3-85	-	-	EAR99

## ACTIVE MULTIPLIERS

Part Number	Input (GHz)	Output (GHz)	Input (dBm)	Output (dBm)	ECCN
<a href="#">ADA-0416</a>	2-8	4-16	0 to +6	+16	EAR99
<a href="#">ADA-1030</a>	5-15	10-30	0 to +6	+16	EAR99
<a href="#">AQA-2156</a>	5.25-14	21-56	-2 to +6	+20	EAR99
<a href="#">ADA-2052</a>	10-26	20-52	-6 to +2	+16	EAR99

### \*New Release

All electrical specifications given are typical values.

Visit [markimicrowave.com](http://markimicrowave.com) for more connectorized components.

**POWER DIVIDERS, High Isolation**

Part Number	Band (GHz)	Loss (dB)	Amplitude Balance (dB)	Isolation (dB)	ECCN
PBR-0003	.0003-3	1.25	±0.4	45	EAR99
PBR-0006	.0003-6	1.5	±0.5	40	EAR99
PBR-0012	.0003-12	1.5	±0.6	35	EAR99

**POWER DIVIDERS, Wilkinson 1:2**

Part Number	Band (GHz)	Loss (dB)	Amplitude Balance (dB)	Phase Balance (°)	Isolation (dB)	ECCN
PD-0R413	0.4-13.2	1	±0.05	±1	24	EAR99
PD-0R426	0.4-26	2	±0.05	±2	24	EAR99
PD-0R510	0.5-10	0.9	±0.1	±1	22	EAR99
PD-0R618	0.6-18	1	±0.05	±1	22	EAR99
PD-0R636	0.6-36	2	±0.1	±3	22	EAR99
PD-0109	1-9	0.75	±0.1	±1	22	EAR99
PD-0126	1-26	1	±0.1	±3	20	EAR99
PD-0140	1-40	1.5	±0.2	±2	20	EAR99
PD-0150	1-50	2	±0.25	±3	20	EAR99
PD-0165	1-65	5	±0.25	±3	20	EAR99
PD-0218	2-18	1	±0.2	±2	22	EAR99
PD-0220	2-20	1	±0.2	±2	22	EAR99
PD-0426	4-26.5	0.8	±0.2	±2	18	EAR99
PD-0440	4-40	1	±0.2	±3	18	EAR99
PD-0450	4-50	1.2	±0.5	±5	18	EAR99
PD-0465	4-65	2	±0.5	±5	18	EAR99
MPDW-10110M2	10-110	3	±0.25	±3	22	EAR99

**POWER DIVIDERS, Wilkinson 1:3**

Part Number	Band (GHz)	Loss (dB)	Amplitude Balance (dB)	Phase Balance (°)	Isolation (dB)	ECCN
PD3-0R412	0.4-12	1.5	±0.1	±2	23	EAR99
PD3-0R616	0.6-16	1.5	±0.1	±2	24	EAR99
PD3-0126	1.5-26.5	1.5	±0.3	±4	24	EAR99

**POWER DIVIDERS, Wilkinson 1:4**

Part Number	Band (GHz)	Loss (dB)	Amplitude Balance (dB)	Phase Balance (°)	Isolation (dB)	ECCN
PD4-0R518	0.5-18	1.5	±0.25	±3	20	EAR99
PD4-0R526	0.5-26.5	2.5	±0.25	±3	19	EAR99
PD4-0R532	0.5-32	2.5	±0.3	±4	19	EAR99
PD4-0120	1-20	1.5	±0.25	±3	20	EAR99
PD4-0126	1-26.5	1.5	±0.3	±3	20	EAR99
PD4-0140	1-40	2.5	±0.4	±4	19	EAR99
PD4-0150	1-50	4	±0.5	±5	20	EAR99
PD4-0218	2-18	1.2	±0.2	±2	20	EAR99

**\*New Release**

All electrical specifications given are typical values.

Visit markimicrowave.com for more connectorized components.

**POWER DIVIDERS, Resistive 1:2**

Part Number	Band (GHz)	Loss (dB)	Amplitude Balance (dB)	Phase Balance (°)	ECCN
PD-0010	DC-10	0.25	±0.1	±1	EAR99
PD-0020	DC-20	0.5	±0.2	±2	EAR99
PD-0030	DC-30	0.5	±0.25	±2	EAR99
PD-0040	DC-40	0.75	±0.25	±2	EAR99
MPDR-00110M2	DC-110	1.5	±0.25	±7.5	EAR99

**ADAPTERS, High Performance**

Part Number	Band (GHz)	Loss (dB)	VSWR	Description	ECCN
ADP-2429	DC-40	0.3	1.2	2.4(M/F) to 2.92(M/F)	EAR99
ADP-29	DC-40	0.3	1.2	2.92(M/F) to 2.92(M/F)	EAR99
ADP-24	DC-50	0.5	1.3	2.4(M/F) to 2.4(M/F)	EAR99
RA40	DC-40	0.3	1.4	2.92M to 2.92F	EAR99
RA50	DC-50	0.3	1.4	2.92M to 2.92F	EAR99

**ATTENUATORS, Precision-Grade**

Part Number	Band (GHz)	Attenuation (dB)	Accuracy (dB)	Return Loss (dB)	ECCN
ATN06-0067(-2HV/-3HV)	DC-67	6.4	see datasheet	23	EAR99
ATN10-0067(-2HV/-3HV)	DC-67	10.5	see datasheet	22	EAR99
ATN06-00110(-2W/-3W)	DC-110	6.5	see datasheet	20	EAR99
ATN10-00110(-2W/-3W)	DC-110	10.5	see datasheet	20	EAR99

**DC BLOCKS, Broadband**

Part Number	Band (GHz)	Loss (dB)	DC Voltage (V)	Rise Time (ps)	Group Delay (ps)	ECCN
DCZ(M-F)29(M-F)29	.000004-40	0.7	16	6	75	EAR99
DCZ(M-F)24(M-F)24	.000004-50	0.7	16	6	75	EAR99

**LIMITERS**

Part Number	Band (GHz)	Loss (dB)	Flat Leakage (dBm)	Peak Power CW (W)	Peak Power Pulsed (W)	P1dB (dBm)	ECCN
HLM-8011U <sup>1</sup>	DC-30	0.8	+7@30GHz	1	4.5	+10	EAR99
HLM-40U <sup>1</sup>	DC-40	1	+16@20GHz	4	20	15	EAR99

<sup>1</sup>Power ratings are dependent on frequency, temperature, and pulse conditions

**TERMINATIONS**

Part Number	Band (GHz)	Impedance ( $\Omega$ )	Return Loss (dB)	ECCN
T(M/E)50-110M	DC-110	50	15	EAR99

**THUMBWHEEL**

Part Number	Description	ECCN
TW-1	quick, secure, wrenchless connection for SMA, 2.92mm and 2.4mm	EAR99

\*New Release

All electrical specifications given are typical values.

Visit markimicrowave.com for more connectorized components.

# SURFACE MOUNTS

## AMPLIFIERS, Driver

Part Number	Band (GHz)	Gain (dB)	Psat (dBm)	OIP3 (dBm)	Bias Voltage (V)	Bias Current (mA)	Package	ECCN
<a href="#">ADM-0012-5931SM</a>	DC-12	11	+18	+26	+3 to +7 VD and -0.3 to 0 VG	85	3mm QFN	EAR99
<a href="#">ADM-0026-5929SM</a>	DC-26.5	13	+20	+26	+3 to +7 VD and -0.3 to 0 VG	165	4mm QFN	EAR99
<a href="#">APM-7099SM<sup>1</sup></a>	0.01-20	14	+25	+27	+5 to +8 VC and +5 to +8 VB	72	4mm QFN	EAR99
<a href="#">APM-7098SM<sup>1</sup></a>	0.1-22	15	+23	+22	+5 to +8 VC and +5 to +8 VB	44	4mm QFN	EAR99
<a href="#">AMM-7473PSM</a>	0.4-27	17	+25	+34	+5 to +7 VD and -0.7 to -0.6 VG	150	4mm QFN	EAR99
<a href="#">APM-7516PSM</a>	1.5-20	11	+22	+33	+5 VC and +5 VB	106	4mm QFN	EAR99
◆ <a href="#">ADM-8006PSM*</a>	2-30	23	23	30	+3V to +6V VG and VD	218	4mm QFN	EAR99
<a href="#">APM-6849SM<sup>1</sup></a>	2-30	11	+21	+20	+5 VC and +5 VB	23	3mm QFN	EAR99
<a href="#">ADM-8007PSM</a>	2-40	23	+24	+30	+3 to +6 VD and +3 to +6 VG	218	4mm QFN	3A001.b.2.d
<a href="#">AMM-7199SM</a>	11-38	21	+21	+29	+3 to +4 VD and -0.6 to -0.4 VG	180	3mm QFN	3A001.b.2.d
<a href="#">AMM-7200SM</a>	12-46	18	+22	+29	+3 to +4 VD and -0.6 to -0.4 VG	180	3mm QFN	3A001.b.2.d
<a href="#">AMM-6702SM</a>	20-50	28	+22	+27	+3 to +4 VD and -0.6 to -0.4 VG	200	4mm KFN	3A001.b.2.d

<sup>1</sup>Low Phase Noise

## AMPLIFIERS, Gain Block & Low Noise

Part Number	Band (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	Voltage (V)	Current (mA)	Package	ECCN
<a href="#">ADM-8622PSM</a>	DC-10	15.5	2	+13.5	+26	+3.3 VD	40	1.3x2mm DFN	EAR99
<a href="#">AKA-1300PSM</a>	DC-14	13	5	+14	+28	+3.8 VD	50	1.3x2mm DFN	EAR99
<a href="#">AKA-1310PSM</a>	DC-14	13	5	+14	+28	+4.6 VD	50	1.3x2mm DFN	EAR99
<a href="#">AKA-1400PSM</a>	DC-14	17	4	+15	+28	+3.8 VD	50	1.3x2mm DFN	EAR99
<a href="#">AKA-1500PSM</a>	DC-14	19	4	+16	+28	+4.2 VD	50	1.3x2mm DFN	EAR99
◆ <a href="#">ADM-8344PSM*</a>	DC-18	18	1.4	+18	+27	+5 V	103	4mm QFN	EAR99
◆ <a href="#">ADM-9028PSM*</a>	DC-20	16	1.8	+14	+23	+6 V	50	4mm QFN	EAR99
<a href="#">ADM-8350PSM</a>	0.09-6	22	1.8	+22	+39.5	+5 VD	84	1.3x2mm DFN	EAR99
<a href="#">ADM-8096PSM</a>	0.09-6	22	1.5	+21	+33	+5 VD	58	1.3x2mm DFN	EAR99
<a href="#">ADM-8095PSM</a>	0.09-10	18	1.2	+18	+30	+5 VD	39	1.3x2mm DFN	EAR99
<a href="#">ADM-8624PSM</a>	0.2-20	11.5	2.8	+13.5	+25	+5 VD	40	1.3x2mm DFN	EAR99
<a href="#">ADM-8475PSM</a>	0.5-18	13	2	+16	+27	+5 VD	40	1.3x2mm DFN	EAR99
<a href="#">ADM-8625PSM</a>	0.75-8	18	1.5	+17	+26	+5 VD	49	3mm QFN	EAR99
<a href="#">ADM-8536PSM</a>	2-20	10	2.5	+13	+25	+5 VD	41	1.3x2mm DFN	EAR99
◆ <a href="#">ADM-9027PSM*</a>	2-24	16	2.5	+16	+25	+6 V	60	4mm QFN	EAR99

\*New Release

All electrical specifications given are typical values.

## ATTENUATORS

Part Number	Band (GHz)	Attenuation (dB)	Return Loss (dB)	Package	ECCN
ATN00-0040PSM	DC-40	0	27	1.3x2mm DFN	EAR99
ATN01-0040PSM	DC-40	1	27	1.3x2mm DFN	EAR99
ATN02-0040PSM	DC-40	2	26	1.3x2mm DFN	EAR99
ATN03-0040PSM	DC-40	3	25	1.3x2mm DFN	EAR99
ATN04-0040PSM	DC-40	4	21	1.3x2mm DFN	EAR99
ATN05-0040PSM	DC-40	5	20	1.3x2mm DFN	EAR99
ATN06-0040PSM	DC-40	6	22	1.3x2mm DFN	EAR99
ATN07-0040PSM	DC-40	7	21	1.3x2mm DFN	EAR99
ATN08-0040PSM	DC-40	8	21	1.3x2mm DFN	EAR99
ATN09-0040PSM	DC-40	9	20	1.3x2mm DFN	EAR99
ATN10-0040PSM	DC-40	10	25	1.3x2mm DFN	EAR99
ATN15-0040PSM	DC-40	15	22	1.3x2mm DFN	EAR99
ATN20-0040PSM	DC-40	20	22	1.3x2mm DFN	EAR99
ATN03-0050CSP1	DC-50	3	20	1.5mm CSP	EAR99
ATN06-0050CSP1	DC-50	6	20	1.5mm CSP	EAR99
ATN10-0050CSP1	DC-50	10	24	1.5mm CSP	EAR99

## BALUNS

Part Number	Band (GHz)	Amp Bal (dB)	Phase Bal (°)	Isolation (dB)	Impedance Ratio	Total Insertion Loss as a Mode Converter (dB)	Package	ECCN
BAL-0003SMG	0.0005-3	0.3	3	9	1:2	3.8	SMG	EAR99
BALH-0003SMG	0.0005-3	0.2	2	7	1:1	2	SMG	EAR99
BALE-0003SMG	0.01-3	0.2	1	9	1:2	4	SMG	EAR99
BALHE-0003SMG	0.01-3	0.2	2	7	1:1	2	SMG	EAR99
BAL-0006SMG	0.0005-6	0.4	3	8	1:2	4	SMG	EAR99
BALH-0006SMG	0.0005-6	0.2	3	6	1:1	2	SMG	EAR99
BALE-0006SMG	0.01-6	0.4	1	9	1:2	4	SMG	EAR99
BALHE-0006SMG	0.01-6	0.2	3	6	1:1	3	SMG	EAR99
BAL-0009SMG	0.0005-9	0.6	5	8	1:2	4.5	SMG	EAR99
BALH-0009SMG	0.0005-9	0.8	5	6	1:1	2.5	SMG	EAR99
BALE-0009SMG	0.01-9	0.5	4	9	1:2	4.5	SMG	EAR99
BALHE-0009SMG	0.01-9	0.5	5	9	1:1	4.5	SMG	EAR99
MBAL-0104SM	1-4	0.2	2	8	1:2	2.5	4mm QFN	EAR99
BAL-0208SMG	2-8	0.3	1	17	1:2	2.5	SMG	EAR99
BAL-0416SMG	4-16	0.4	1	15	1:2	3.3	SMG	EAR99
BAL-0012SSG	0.01-12	0.6	5	8	1:2	5	SSG	EAR99
BALH-0012SSG	0.01-12	0.6	5	5.5	1:1	2	SSG	EAR99
BAL-0020SLG	0.01-20	0.4	5	12	1:2	4.5	SLG	EAR99
MBAL-0220CSP2	2-20	0.3	3	5.3	1:2	1.9	2.5mm CSP2	EAR99
MBAL-0220SM	2-20	0.25	3	10	1:2	6	4mm QFN	EAR99
BAL-0620SMG	6-20	0.2	1	14	1:2	2.6	SMG	EAR99
BAL-0032SSG	0.01-32	0.5	5	8	1:2	5	SSG	EAR99
MBAL-1445SM	14-45	0.2	2	18	1:2	4.5	4mm QFN	EAR99

\*New Release

All electrical specifications given are typical values.

**BIAS TEES**

Part Number	Band (GHz)	Insertion Loss (dB)	DC Current (A)	DC Port Isolation (dB)	DC Voltage (V)	Package	ECCN
BT-0010SMG(-1/-2)	0.02-10	0.5	0.5	40	30	SMG	EAR99
BTL-0012SMG(-1/-2)	0.0005-12	0.5	0.5	35	30	SMG	EAR99
<a href="#">BTM-0026PSM-2</a>	0.01-26	0.43	0.32	25	16	PSM	EAR99
BT-0026SMG(-1/-2)	0.02-26	1	0.5	40	35	SMG	EAR99
BTL-0026SMG(-1/-2)	0.0005-26	1	0.5	35	30	SMG	EAR99
BT-0035SMG(-1/-2)	0.02-35	1	0.5	35	30	SMG	EAR99
BTL-0035SMG(-1/-2)	0.0005-35	1	0.5	35	30	SMG	EAR99

**COUPLER, Directional**

Part Number	Band (GHz)	VSWR	Mean Coupling (dB)	Directivity (dB)	Package	ECCN
<a href="#">MC16-0222SM</a>	2-22	1.22	16	19	4mm QFN	EAR99

**HYBRIDS, 90° Quadrature**

Part Number	Band (GHz)	Amp Bal (dB)	Phase Bal (°)	Isolation (dB)	Package	ECCN
<a href="#">MQS-0218SM</a>	2-18	±1	±3	15	4mm QFN	EAR99
<a href="#">MQS-0518SM</a>	5-18	±0.5	±2.5	17	4mm QFN	EAR99

**EQUALIZERS, Positive Gain Slope**

Part Number	Band (GHz)	Low Freq Attenuation (dB)	Typ Return Loss (dB)	Package	ECCN
MEQX-7ASM	DC-7	<a href="#">3, 6, 10 &amp; 12.5</a>	29, 29, 27, 27	3mm QFN	EAR99
MEQX-14ASM	DC-14	<a href="#">3, 6 &amp; 10</a>	23, 28, 29	3mm QFN	EAR99
MEQX-20ASM	DC-20	<a href="#">3, 5, 6, 7.5, 10 &amp; 11</a>	19, 22, 23, 26, 20, 27	3mm QFN	EAR99
<a href="#">MEQ6-26CSP1</a>	DC-26	6	23	1.5mm CSP1	EAR99
<a href="#">MEQ10-26CSP1</a>	DC-26	10	17	1.5mm CSP1	EAR99
<a href="#">MEQ06-45CSP1</a>	DC-45	6	17	1.5mm CSP1	EAR99
<a href="#">MEQ10-45CSP1</a>	DC-45	10	13	1.5mm CSP1	EAR99

**DIPLEXERS**

Part Number	Passband Low (GHz)	Passband High (GHz)	Isolation (dB)	Package	ECCN
DPX-M50(-1/-2)	DC-0.035	0.07-10	24	SM	EAR99
DPX-0R5(-1/-2)	DC-0.36	0.7-8	24	SM	EAR99
DPX-1(-1/-2)	DC-0.85	1.4-5	24	SM	EAR99
DPX-2(-1/-2)	DC-1.5	2.7-7	25	SM	EAR99
DPX-3(-1/-2)	DC-2.3	4.2-8	25	SM	EAR99
DPX-4(-1/-2)	DC-2.8	5.5-12	30	SM	EAR99
<a href="#">MDPX-0305PSM</a>	DC-3	5-26.5	37	3mm QFN	EAR99
<a href="#">MDPX-0407PSM</a>	DC-4	7-26.5	38	3mm QFN	EAR99

**\*New Release**

All electrical specifications given are typical values.

**FIXED FILTERS, Lowpass**

Part Number	3dB Cutoff (GHz)	Passband Insertion Loss (dB)	Passband Return Loss (dB)	Stopband Frequency (GHz)	Stopband Suppression (dB)	Package	ECCN
MFLP-00001PSM	6.10	0.80	21	7.50-40.00	57	4mm QFN	EAR99
MFLP-00002PSM	9.40	0.70	23	12.00-40.00	52	4mm QFN	EAR99
MFLP-00003PSM	12.30	0.50	21	16.00-40.00	52	4mm QFN	EAR99
MFLP-00004PSM	15.40	0.60	21	20.00-40.00	49	4mm QFN	EAR99
MFLP-00005PSM	18.50	0.50	21	22.00-40.00	49	4mm QFN	EAR99

**FIXED FILTERS, Highpass**

Part Number	3dB Cutoff (GHz)	Passband Insertion Loss (dB)	Passband Return Loss (dB)	Stopband Frequency (GHz)	Stopband Suppression (dB)	Package	ECCN
MFHP-00001PSM	2.00	0.40	19	DC-1.00	79	4mm QFN	EAR99
MFHP-00004PSM	6.00	0.40	20	DC-3.30	60	4mm QFN	EAR99
MFHP-00005PSM	8.00	0.50	21	DC-4.80	65	4mm QFN	EAR99
MFHP-00002PSM	9.80	0.40	17	DC-7.50	53	4mm QFN	EAR99
MFHP-00006PSM	12.00	0.50	21	DC-8.30	55	4mm QFN	EAR99
◆ MFHP-00007CSP1*	14.32	0.52	20	DC-11.40	62	1.5mm CSP1	EAR99
MFHP-00003PSM	15.40	0.70	17	DC-12.70	53	4mm QFN	EAR99

**FIXED FILTERS, Absorptive**

Part Number	Center Freq (GHz)	1dBc Passband (GHz)	Insertion Loss in Passband (dB)	Passband Return Loss (dB)	Stopband Return Loss (dB)	Package	ECCN
MFQH-00001PSM	19.80	18.50-21.20	3.20	24	13	5mm QFN	EAR99

**CONFIGURABLE FILTERS, Tunable**

Part Number	Center Freq (GHz)	3dBc Passband (GHz)	Insertion Loss at Center Freq (dB)	Passband Return Loss (dB)	Stopband Rejection (dB)	OIP3 (dBm)	Package	ECCN
◆ MFBT-00001PSM*	3.50-9.50	3.00-10.00	6.50	15	35	33	4mm QFN	3A001.b.5.a
◆ MFBT-00002PSM*	5.50-15.50	4.50-16.50	6.50	15	35	33	4mm QFN	3A001.b.5.a
◆ MFBT-00003PSM*	10.00-26.00	8.00-30.00	7.50	10	35	35	4mm QFN	3A001.b.5.a

\*New Release

All electrical specifications given are typical values.

**FIXED FILTERS, Bandpass**

Part Number	Center Freq (GHz)	1dBc Passband (GHz)	Insertion Loss in Passband (dB)	Package	ECCN
<a href="#">MFBP-00010PSM</a>	3.45	2.20-5.90	1.50	5mm QFN	EAR99
<a href="#">MFBP-00011PSM</a>	4.00	2.30-8.05	1.24	5mm QFN	EAR99
<a href="#">MFBP-00001PSM</a>	5.40	4.70-6.20	1.30	4mm QFN	EAR99
<a href="#">MFBP-00002PSM</a>	6.60	5.90-7.50	1.50	4mm QFN	EAR99
<a href="#">MFBP-00004PSM</a>	7.75	6.05-10.30	1.85	5mm QFN	EAR99
<a href="#">FB-0785SMG</a>	7.85	7.25-8.45	2.20	SMG	EAR99
<a href="#">FB-0850SM</a>	8.50	7.85-9.20	2.00	SM	EAR99
<a href="#">MFBC-00001PSM</a>	8.70	7.40-9.90	2.00	5mm QFN	EAR99
◆ <a href="#">MFBP-00059PSM*</a>	8.80	7.0-11.0	1.25	5mm QFN	EAR99
<a href="#">FB-0900SM</a>	9.00	8.40-9.60	2.20	SM	EAR99
<a href="#">FB-0955SM</a>	9.55	8.90-10.20	2.00	SM	EAR99
<a href="#">MFBA-00004PSM</a>	10.00	8.40-12.25	1.90	5mm QFN	EAR99
<a href="#">MFBP-00006PSM</a>	10.20	8.20-13.50	1.83	5mm QFN	EAR99
<a href="#">MFBP-00005PSM</a>	10.40	6.25-18.05	1.10	5mm QFN	EAR99
<a href="#">FB-1050SM</a>	10.50	9.60-11.40	2.00	SM	EAR99
<a href="#">MFBC-00002PSM</a>	11.00	9.13-12.40	1.80	5mm QFN	EAR99
<a href="#">FB-1140SM</a>	11.40	10.45-12.35	2.00	SM	EAR99
<a href="#">MFBP-00008PSM</a>	11.85	10.40-13.85	1.73	5mm QFN	EAR99
<a href="#">MFBA-00003PSM</a>	12.00	10.10-14.10	2.10	5mm QFN	EAR99
<a href="#">FB-1215SM</a>	12.15	11.35-12.95	2.00	SM	EAR99
<a href="#">FB-1300SMG</a>	13.00	12.00-14.00	2.00	SMG	EAR99
◆ <a href="#">MFBP-00029PSM*</a>	13.07	12.24-13.95	2.65	5mm QFN	EAR99
<a href="#">MFBP-00007PSM</a>	13.40	10.25-18.25	1.80	5mm QFN	EAR99
<a href="#">MFBC-00003PSM</a>	14.15	11.85-15.90	1.70	5mm QFN	EAR99
<a href="#">FB-1445SM</a>	14.45	13.20-15.70	2.00	SM	EAR99
<a href="#">MFB-1445SM</a>	14.45	13.60-15.10	3.80	3mm QFN	EAR99
<a href="#">FB-1575SMG</a>	15.75	14.60-16.90	2.00	SMG	EAR99
<a href="#">MFBP-00009PSM</a>	15.85	14.10-17.85	1.86	5mm QFN	EAR99
<a href="#">MFBA-00001PSM</a>	16.00	14.10-17.90	2.40	5mm QFN	EAR99
<a href="#">MFBC-00010PSM</a>	16.50	14.60-18.90	1.70	5mm QFN	EAR99
◆ <a href="#">MFBP-00030PSM*</a>	16.94	16.19-17.72	3.16	5mm QFN	EAR99
<a href="#">MFBC-00004PSM</a>	17.50	14.90-19.90	1.60	5mm QFN	EAR99
◆ <a href="#">MFBP-00060PSM*</a>	17.60	13.8-22.5	0.95	5mm QFN	EAR99
<a href="#">MFBC-00011PSM</a>	18.50	16.15-20.70	1.70	5mm QFN	EAR99
<a href="#">MFBP-00034PSM*</a>	19.61	18.05-21.3	2.25	5mm QFN	EAR99
<a href="#">MFBC-00012PSM</a>	20.30	17.20-23.40	1.55	5mm QFN	EAR99
◆ <a href="#">MFBP-00036PSM*</a>	20.56	17.55-24.09	1.55	5mm QFN	EAR99
<a href="#">MFBC-00005PSM</a>	22.00	18.60-25.10	1.40	5mm QFN	EAR99
<a href="#">MFBA-00002PSM</a>	22.20	18.10-26.00	1.80	5mm QFN	EAR99
◆ <a href="#">MFBP-00035PSM*</a>	22.47	20.56-24.55	2.21	5mm QFN	EAR99
<a href="#">MFBC-00013PSM</a>	22.50	19.50-26.20	1.50	5mm QFN	EAR99
◆ <a href="#">MFBP-00037PSM*</a>	25.70	22.45-29.43	1.58	5mm QFN	EAR99

**\*New Release**

All electrical specifications given are typical values.

**FIXED FILTERS, Bandpass**

Part Number	Center Freq (GHz)	1dBc Passband (GHz)	Insertion Loss in Passband (dB)	Package	ECCN
<a href="#">MFBC-00014PSM</a>	25.75	22.20-29.90	1.75	5mm QFN	EAR99
<a href="#">MFBC-00006PSM</a>	28.00	23.60-32.20	1.6	5mm QFN	EAR99
<a href="#">MFBC-00015PSM</a>	30.00	25.40-34.70	1.39	5mm QFN	EAR99
◆ <a href="#">MFBP-00038PSM*</a>	30.71	27.69-34.06	2.05	5mm QFN	EAR99
◆ <a href="#">MFBP-00058PSM*</a>	30.90	29.9-32.0	2.74	5mm QFN	EAR99
◆ <a href="#">MFBP-00028PSM*</a>	31.52	30.82-32.24	3.25	5mm QFN	EAR99
◆ <a href="#">MFBP-00031PSM*</a>	32.58	32.14-33.03	4.31	5mm QFN	EAR99
◆ <a href="#">MFBP-00033PSM*</a>	32.63	31.95-33.33	3.35	5mm QFN	EAR99
<a href="#">MFBC-00007PSM</a>	35.00	30.10-39.30	1.5	5mm QFN	EAR99
◆ <a href="#">MFBP-00027PSM*</a>	35.13	34.15-36.13	3.1	5mm QFN	EAR99
◆ <a href="#">MFBP-00039PSM*</a>	35.63	33.08-38.38	2.46	5mm QFN	EAR99
<a href="#">MFBC-00016PSM</a>	36.00	30.60-41.00	1.21	5mm QFN	EAR99
◆ <a href="#">MFBP-00032PSM*</a>	36.04	35.2-36.89	3.45	5mm QFN	EAR99

**LIMITERS**

Part Number	Band (GHz)	Loss (dB)	Flat Leakage (dBm)	Average Power Handling (W)	Peak Power Handling (W)	P1dB (dBm)	Package	ECCN
<a href="#">DLM-10SM<sup>1</sup></a>	DC-10	0.75	Adjustable	0.5	—	+10	3mm QFN	EAR99
◆ <a href="#">HLM-100001PSM*</a> <sup>1</sup>	DC-10	0.9	+8.5@10GHz	10	—	+11	3mm QFN	EAR99
<a href="#">HLM-20PSM<sup>1</sup></a>	DC-20	0.5	+13@20GHz	5	50	+15	4mm QFN	EAR99
<a href="#">HLM-40PSM<sup>1</sup></a>	DC-40	0.5	+15@20GHz	2.5	9.5	+14	4mm QFN	EAR99
<a href="#">HLM-8010CSP1<sup>1</sup></a>	DC-40	0.5	+11@20GHz	1.9	3.2	+11	1.5mm CSP1	EAR99
◆ <a href="#">HLM-70CSP2*</a> <sup>1</sup>	DC - 70	0.5	+13@40GHz	1	—	+8	2.5mm CSP2	EAR99

<sup>1</sup>Power ratings are dependent on frequency, temperature, and pulse conditions

**IQ MIXERS**

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	Image Rej (dBc)	L-R Isolation (dB)	Package	ECCN
<a href="#">MMIQ-0106HCSM</a>	1.5-5.5	DC-3	8	33	62	5mm QFN	EAR99
<a href="#">MMIQ-0205HSM</a>	1.75-5	DC-2	8	32	61	5mm QFN	EAR99
<a href="#">MMIQ-0218(L/H)SM</a>	2-18	DC-3	8	27/35	58/53	6mm QFN	EAR99
<a href="#">MMIQ-0416(L/H)SM</a>	4-16	DC-6	9/8.5	35/31	51	4mm QFN	EAR99
<a href="#">MMIQ-0520(L/H)SM</a>	5-20	DC-6	9	35	46/39	4mm QFN	EAR99
<a href="#">MMIQ-0626(L/H)SM</a>	6-26	DC-6	9	35	39/36	4mm QFN	EAR99
<a href="#">MMIQ-1040(L/H)SM</a>	10-40	DC-10	9	35	50/40	4mm QFN	EAR99
<a href="#">MMIQ-1867(L/H)SM</a>	18-67	DC-23	9	32/29	48.5/44	4mm QFN	EAR99

\*New Release

All electrical specifications given are typical values.

**IQ MIXERS, Integrated Drive**

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	Image Rej (dBc)	LO Drive (dBm)	Package	ECCN
◆ <a href="#">MMIQA-0218HPSM*</a>	2-18	DC-3	7.5	28	<a href="#">contact support</a>	7mm QFN	EAR99
◆ <a href="#">MMIQA-0626HPSM*</a>	6-26	DC-6	9	30	-2 to +8	7mm QFN	EAR99
◆ <a href="#">MMIQA-1035SPSM*</a>	10-35	DC-12	9	29	<a href="#">contact support</a>	7mm QFN	EAR99
<a href="#">MMIQA-1040HPSM</a>	10-40	DC-10	9	29	<a href="#">contact support</a>	7mm QFN	EAR99

**MIXERS, Double Balanced**

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	IIP3 (dBm)	LO Drive (dBm)	Package	ECCN
<a href="#">MM1-0115HPSM</a>	1-15	DC-2.5	8	+21	+17	4mm QFN	EAR99
MM1-0212(L/H/S)SM	2-12	DC-3	8.5/8.5/9	+13/+25/+28	+9/+15/+20	4mm QFN	EAR99
MM1-0222(L/H)SM	2-22	DC-3.5	7/7.5	+11.5/+20	+11/+20	3mm QFN	EAR99
MM1-0312(H/S)SM	3-12	DC-4.5	7	+19/+24	+15/+20	3mm QFN	EAR99
<a href="#">MM1-0320HSM</a>	3-20	DC-4	8	+20	+15	3mm QFN	EAR99
<a href="#">MM1-0424SSM</a>	4.5-24	DC-4	8	+25	+20	3mm QFN	EAR99
MM1-0626(H/S)SM	6-26.5	DC-9	7.5/8	+21/+24.5	+15/+20	3mm QFN	EAR99
<a href="#">MM1-0726HSM</a>	7-26.5	DC-9	7.5	+17	+20	3mm QFN	EAR99
MM1-0832(L/H)SM	8-32	DC-12	8.5/8	+11/+20.5	+9/+15	3mm QFN	EAR99
<a href="#">MM1-0832HPSM</a>	8-32	DC-12	8	+23	+15	3mm QFN	EAR99
<a href="#">MM1-1040HPSM</a>	10-40	DC-12	9	+20	+15	3mm QFN	EAR99
<a href="#">MM1-1130HSM</a>	11-30	DC-12	7	+21	+15	3mm QFN	EAR99
MM1-1453(L/H)SM	14-53	DC-22	8/7.6	+13/+17	+13/+15	4mm QFN	EAR99
MM1-1850(H/S)SM	18-50	DC-21	8.7/9.7	+17/+28	+15/+20	4mm KFN	EAR99
<a href="#">MM1-2567LSM</a>	25-67	DC-30	11	+9	+9	3mm QFN	EAR99

**MIXERS, Triple Balanced**

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	IIP3 (dBm)	LO Drive (dBm)	Package	ECCN
MM2-0530(L/H)SM	5-30	2-20	10/9	+19/+28	+15/+20	4mm QFN	EAR99
<a href="#">MM2D-0528SCSM<sup>1</sup></a>	5-28	DC-12	10	+31	+28	4mm QFN	EAR99
MT3-0113(L/H/S)CQG	1.5-13	0.01-7	7.5/7.5/8.5	+24/+30/+36	+15/+20/+27	CQG	EAR99
<a href="#">MT3D-0113LSM<sup>1</sup></a>	1.5-13	see plots	7.5	+27	+17	4mm QFN	EAR99
<a href="#">MT3D-0325HCSM<sup>1</sup></a>	3-25	DC-6	7.5	+25	+20	4mm QFN	EAR99
<a href="#">MT3L-0113HSM</a>	1.5-13	0.25-5	8.5	+20	+31	4mm QFN	EAR99
MT3H-0113(L/H)SM	1.5-13	0.8-8.5	8	+22/+29	+15/+20	4mm QFN	EAR99
T3-18GLCTG(-1/-2)	0.01-18	0.001-10	7.5	+30	+20	CQG	EAR99
T3H-18GLCTG(-1/-2)	0.01-18	0.01-18	9.5	+30	+20	CQG	EAR99
T3-20GLCTG(-1/-2)	0.01-20	0.001-10	7.5	+30	+20	CQG	EAR99
T3H-20GLCTG(-1/-2)	0.01-20	0.01-18	9.5	+30	+20	CQG	EAR99

<sup>1</sup>Differential IF**\*New Release**

All electrical specifications given are typical values.

## MIXERS, Integrated Drive

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	IIP3 (dBm)	LO Drive (dBm)	Package	ECCN
<a href="#">MT3A-0113HCSM</a>	1.5-13	0.5-8.5	9.5	+28	+5 to +15	6mm QFN	EAR99
<a href="#">MM1A-0222HPSM</a>	2-22	DC-3.5	7.5	+17	+3 to +15	5mm QFN	EAR99
<a href="#">MM1A-0622HPSM</a>	6-22	DC-9	7.5	+21	+3 to +15	5mm QFN	EAR99
◆ <a href="#">MM2A-0530HPSM*</a>	5-30	2-10	9	+25	-6 to +3	7mm QFN	EAR99
<a href="#">MM1A-0832HPSM</a>	8-32	DC-12	9	+24	-6 to +6	3x4.6mm QFN	EAR99
<a href="#">MM1A-1040HPSM</a>	10-40	DC-12	10	+23	+3 to +9	3x4.6mm QFN	EAR99
<a href="#">MM1A-1855HPSM</a>	18-55	DC-21	9	+20	+4 to +10	3x4.6mm QFN	EAR99

## PASSIVE MULTIPLIERS & NON LINEAR TRANSMISSION LINES

Part Number	Type	Input (GHz)	Output (GHz)	1F Supp (dBc)	3F Supp (dBc)	Package	ECCN
<a href="#">MMD-0415HPSM</a>	Doubler	2-7.5	4-15	27	38	3mm QFN	EAR99
MMD-1030( <a href="#">LC/H</a> )SM	Doubler	5-15	10-30	31/34	43/46	3mm QFN	EAR99
MMD-2050( <a href="#">L/H</a> )SM	Doubler	10-25	20-50	35/33	46/40	3mm QFN	EAR99
<a href="#">NLTL-6794SM</a>	Comb Generator	0.1-1	0.1-30	—	—	6mm QFN	EAR99
<a href="#">NLTL-6796SM</a>	Comb Generator	0.5-3.5	0.5-50	—	—	6mm QFN	EAR99
<a href="#">NLTL-6273SM</a>	Comb Generator	0.7-5	0.7-24	—	—	5mm QFN	EAR99

## POWER DIVIDERS 1:2

Part Number	Band (GHz)	Excess Loss (dB)	Amp Bal (dB)	Isolation (dB)	Type	Package	ECCN
<a href="#">PD-0030SMG</a>	DC-30	1	±0.25	6	Resistive	SMG	EAR99
<a href="#">PBR-0003SMG</a>	0.01-3	1.5	±0.8	40	High Isolation	SMG	EAR99
<a href="#">PBR-0006SMG</a>	0.01-6	1.7	±0.8	35	High Isolation	SMG	EAR99
<a href="#">PBR-0012SMG</a>	0.01-12	1.7	±1	30	High Isolation	SMG	EAR99
<a href="#">MPD-0226SM</a>	2-26.5	1.5 to 3	±0.2	20	Wilkinson	4mm QFN	EAR99
<a href="#">PD-0434SM</a>	4-34	1.5	±0.25	20	High Isolation	SM	EAR99
<a href="#">PD-0530SMG</a>	5-30	1.5	±0.1	25	Wilkinson	SMG	EAR99
<a href="#">PD-0535SM</a>	5-35	1.5	±0.25	18	Wilkinson	SM	EAR99
<a href="#">MPDR-0070CSP2</a>	DC-70	1.5	±0.25	see table	Resistive	2.5mm CSP2	EAR99
<a href="#">MPDW-0670CSP2</a>	6-70	1	±0.1	24	Wilkinson	2.5mm CSP2	EAR99

## SWITCHES

Part Number	Band (GHz)	Insertion Loss (dB)	Isolation dB)	IIP3 (dB)	Package	ECCN
<a href="#">MSW2-1001ELGA</a>	0.1-40	1.2	38	50	2.25mm LGA	EAR99

\*New Release

All electrical specifications given are typical values.

# BARE DIE

## AMPLIFIERS, Driver

Part Number	Band (GHz)	Gain (dB)	Psat (dBm)	OIP3 (dBm)	Voltage (V)	Current (mA)	ECCN
<a href="#">ADM-5931CH</a>	DC-28	11	+18	+27	+3 to +7 VD and -0.3 to 0 VG	85	EAR99
<a href="#">ADM-5974CH</a>	DC-35	14	+22	+27	+3 to +7 VD and -0.3 to 0 VG	160	3A001.b.2.d
<a href="#">AMM-9024CH</a>	DC-70	11.5	+12.5	-	+5 VD and -0.25 VG	45	3A001.b.2.d
<a href="#">APM-7099CH<sup>1</sup></a>	0.01-20	14	+25	+24	+5 to +8 VC and +5 to +8 VB	72	EAR99
<a href="#">APM-7098CH<sup>1</sup></a>	0.1-22	14	+23	+24	+5 to +8 VC and +5 to +8 VB	44	EAR99
<a href="#">APM-6849CH<sup>1</sup></a>	2-30	11	+21	+21	+5 VC and +5 VB	23	EAR99
<a href="#">AMM-7199CH</a>	11-38	20.5	+21	+31	+3 to +4 VD and -0.6 to -0.4 VG	180	3A001.b.2.d
<a href="#">AMM-7200CH</a>	12-46	18	+21.5	+29	+3 to +4 VD and -0.6 to -0.4 VG	180	3A001.b.2.d
<a href="#">AMM-6702CH</a>	20-55	24	+21	+27	+3 to +4 VD and -0.6 to -0.4 VG	200	3A001.b.2.d
<a href="#">AMM-7203CH</a>	30-60	11.5	+16	+21	+1.5 to +3 VD and -0.6 to -0.4 VG	80	3A001.b.2.d

<sup>1</sup>Low Phase Noise

## AMPLIFIERS, Gain Block & Low Noise

Part Number	Band (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	Voltage (V)	Current (mA)	ECCN
<a href="#">AKA-1300D</a>	DC-14	13	5	+14	+28	+3.8 VD	50	EAR99
<a href="#">AKA-1310D</a>	DC-14	13	5	+14	+28	+4.6 VD	50	EAR99
<a href="#">AKA-1400D</a>	DC-14	17	4	+15	+28	+3.8 VD	50	EAR99
<a href="#">AKA-1500D</a>	DC-14	19	4	+16	+28	+4.2 VD	50	EAR99
<a href="#">ADM-8558CH</a>	DC-20	16	1.8	+14	+23	+6 VD	50	EAR99
◆ <a href="#">ADM-9181CH*</a>	DC-26	15	6	+21	+30	+5 VD +3 VB	130	EAR99
<a href="#">ADM-8096CH</a>	0.09-6	22	1.9	+21	+33	+5 VD	58	EAR99
<a href="#">ADM-8095CH</a>	0.09-10	18	1.5	+18	+30	+5 VD	39	EAR99
<a href="#">ADM-8556CH</a>	6-20	24	1.3	+16	+27	+3 VD	67	EAR99

\*New Release

All electrical specifications given are typical values.

## ATTENUATORS

Part Number	Band (GHz)	Attenuation (dB)	Return Loss (dB)	ECCN
ATN00-0067CH	DC-67	0	32	EAR99
ATN01-0067CH	DC-67	1	33	EAR99
ATN02-0067CH	DC-67	2	35	EAR99
ATN03-0067CH	DC-67	3	37	EAR99
ATN04-0067CH	DC-67	4	36	EAR99
ATN05-0067CH	DC-67	5	36	EAR99
ATN06-0067CH	DC-67	6	37	EAR99
ATN07-0067CH	DC-67	7	33	EAR99
ATN08-0067CH	DC-67	8	38	EAR99
ATN09-0067CH	DC-67	9	38	EAR99
ATN10-0067CH	DC-67	10	38	EAR99
◆ ATN13-0067CH*	DC-67	13	32	EAR99
◆ ATN15-0067CH*	DC-67	15	34	EAR99
◆ ATN17-0067CH*	DC-67	17	30	EAR99
◆ ATN20-0067CH*	DC-67	20	35	EAR99
ATN00-00110CH	DC-110	0	21	EAR99
ATN01-00110CH	DC-110	1	20	EAR99
ATN02-00110CH	DC-110	2	23	EAR99
ATN03-00110CH	DC-110	3	22	EAR99
ATN04-00110CH	DC-110	4	22	EAR99
ATN05-00110CH	DC-110	5	25	EAR99
ATN06-00110CH	DC-110	6	26	EAR99
ATN07-00110CH	DC-110	7	27	EAR99
ATN08-00110CH	DC-110	8	26	EAR99
ATN09-00110CH	DC-110	9	26	EAR99
ATN10-00110CH	DC-110	10	25	EAR99
◆ ATN13-00110CH*	DC-110	13	25	EAR99
◆ ATN15-00110CH*	DC-110	15	26	EAR99
◆ ATN17-00110CH*	DC-110	17	29	EAR99
◆ ATN20-00110CH*	DC-110	20	23	EAR99

## BALUNS

Part Number	Band (GHz)	Amp Bal (dB)	Phase Bal (°)	Isolation (dB)	Impedance Ratio	Total Insertion Loss as a Mode Converter (dB)	ECCN
MBAL-1440CH	14-40	0.2	1.1	13	1:2	3	EAR99

\*New Release

All electrical specifications given are typical values.

**DIPLEXERS**

Part Number	Passband Low (GHz)	Passband High (GHz)	Isolation (dB)	ECCN
<a href="#">MDPX-0305CH</a>	DC-3	5-26.5	40	EAR99
<a href="#">MDPX-0407CH</a>	DC-4	7-26.5	38	EAR99
<a href="#">MDPX-0609CH</a>	DC-6	9-26.5	51	EAR99
◆ <a href="#">MDPX-0710CH*</a>	DC-7	7-26.5	45	EAR99
<a href="#">MDPX-2330CH</a>	DC-23	30-60	20	EAR99
<a href="#">MDPX-2734CH</a>	DC-27	34-60	20	EAR99
<a href="#">MDPX-00002CH</a>	DC-35	43.3-59.9	41	EAR99
<a href="#">MDPX-00001CH<sup>1</sup></a>	13.2-15.4	17.4-20.3	59	EAR99

<sup>1</sup>Duplexer**EQUALIZERS, Positive Gain Slope**

Part Number	Band (GHz)	Low Freq Attenuation (dB)	Typ Return Loss (dB)	ECCN
<a href="#">MEQX-7ACH</a>	DC-7	<a href="#">3, 6, 10 &amp; 12.5</a>	29, 29, 27, 27	EAR99
<a href="#">MEQX-14ACH</a>	DC-14	<a href="#">3, 6 &amp; 10</a>	23, 22, 24	EAR99
<a href="#">MEQX-20ACH</a>	DC-20	<a href="#">3, 5, 6, 7.5, 10 &amp; 11</a>	21, 22, 21, 23, 25, 23	EAR99
<a href="#">MEQX-30ACH</a>	DC-30	<a href="#">3, 6 &amp; 10</a>	20	EAR99
<a href="#">MEQX-60ACH</a>	DC-60	<a href="#">3, 6 &amp; 10</a>	15	EAR99
<b>MEQX-70ACH</b>	DC-70	<a href="#">4*, 6*, 8* &amp; 10*</a>	31, 29, 33, 25	EAR99

**FIXED FILTERS, Lowpass**

Part Number	3dB Cutoff (GHz)	Passband Insertion Loss (dB)	Passband Return Loss (dB)	Stopband Frequency (GHz)	Stopband Suppression (dB)	ECCN
<a href="#">MFLP-00001CH</a>	6.15	0.50	20	7.50-40.00	45	EAR99
<a href="#">MFLP-00002CH</a>	9.30	0.50	24	12.00-40.00	52	EAR99
<a href="#">MFLP-00003CH</a>	12.20	0.50	20	16.00-40.00	46	EAR99
◆ <a href="#">MFLP-00006CH*</a>	12.94	0.50	24	15.80-50.00	48	EAR99
<a href="#">MFLP-00004CH</a>	15.20	0.50	21	20.00-40.00	44	EAR99
<a href="#">MFLP-00005CH</a>	18.30	0.40	21	22.00-40.00	49	EAR99

**FIXED FILTERS, Highpass**

Part Number	3dB Cutoff (GHz)	Passband Insertion Loss (dB)	Passband Return Loss (dB)	Stopband Frequency (GHz)	Stopband Suppression (dB)	ECCN
<a href="#">MFHP-00001CH</a>	2.00	0.40	20	DC-1.00	79	EAR99
<a href="#">MFHP-00002CH</a>	10.00	0.90	13	DC-7.50	53	EAR99
<a href="#">MFHP-00003CH</a>	15.50	1.30	11	DC-12.70	48	EAR99

**FIXED FILTERS, Absorptive**

Part Number	Center Freq (GHz)	1dBc Passband (GHz)	Insertion Loss in Passband (dB)	Passband Return Loss (dB)	Stopband Return Loss (dB)	ECCN
<a href="#">MFQH-00001CH</a>	19.90	18.50-21.30	3.40	25	12	EAR99

**\*New Release**

All electrical specifications given are typical values.

**FIXED FILTERS, Bandpass**

Part Number	Center Freq (GHz)	1dBc Passband (GHz)	Insertion Loss in Passband (dB)	ECCN
◆ <a href="#">MFBP-00040CH*</a>	3.31	1.62-6.78	1.01	EAR99
<a href="#">MFBP-00001CH</a>	5.40	4.70-6.10	1.30	EAR99
<a href="#">MFBP-00002CH</a>	6.60	5.90-7.40	1.53	EAR99
<a href="#">MFBA-00004CH</a>	10.00	8.40-12.50	1.90	EAR99
◆ <a href="#">MFBP-00041CH*</a>	10.10	5.30-19.24	1.05	EAR99
<a href="#">MFB-1100CH</a>	11.00	9.50-12.50	2.00	EAR99
<a href="#">MFBA-00003CH</a>	12.00	10.10-14.10	2.10	EAR99
<a href="#">MFBP-00026CH</a>	12.50	10.00-14.75	1.20	EAR99
◆ <a href="#">MFBP-00054CH*</a>	13.70	11.10-17.00	1.43	EAR99
◆ <a href="#">MFBP-00043CH*</a>	14.85	12.14-18.16	1.37	EAR99
<a href="#">MFBB-00001CH</a>	15.10	14.60-15.65	2.57	EAR99
<a href="#">MFB-1600CH</a>	16.00	12.60-18.60	1.50	EAR99
<a href="#">MFBA-00001CH</a>	16.00	14.10-17.90	2.40	EAR99
◆ <a href="#">MFBP-00048CH*</a>	16.18	15.15-17.29	2.04	EAR99
<a href="#">MFBP-00025CH</a>	16.50	13.15-19.45	1.20	EAR99
◆ <a href="#">MFBP-00052CH*</a>	18.60	14.70-23.60	1.39	EAR99
◆ <a href="#">MFBP-00053CH*</a>	18.90	15.80-22.70	1.40	EAR99
<a href="#">MFB-2025CH</a>	20.25	16.75-24.40	1.50	EAR99
◆ <a href="#">MFBP-00044CH*</a>	20.92	17.83-24.46	1.52	EAR99
<a href="#">MFBB-00002CH</a>	21.75	20.25-23.25	1.60	EAR99
<a href="#">MFBP-00024CH</a>	22.00	18.65-25.80	1.43	EAR99
<a href="#">MFBA-00002CH</a>	22.20	18.10-26.00	1.80	EAR99
<a href="#">MFB-2400CH</a>	24.00	21.00-27.00	1.50	EAR99
<a href="#">MFB-2500CH</a>	25.00	18.00-32.00	1.50	EAR99
◆ <a href="#">MFBP-00042CH*</a>	26.25	17.70-38.93	1.82	EAR99
<a href="#">MFB-2625CH</a>	26.25	21.50-30.00	1.50	EAR99
◆ <a href="#">MFBP-00045CH*</a>	26.27	23.99-28.75	2.01	EAR99
◆ <a href="#">MFBP-00056CH*</a>	27.00	21.80-33.40	1.33	EAR99
◆ <a href="#">MFBP-00055CH*</a>	27.20	22.30-33.20	1.29	EAR99
<a href="#">MFBP-00023CH</a>	28.50	25.00-33.30	1.70	EAR99
◆ <a href="#">MFBP-00046CH*</a>	31.66	28.28-35.45	1.72	EAR99
<a href="#">MFB-3175CH</a>	31.75	26.60-36.70	1.50	EAR99
<a href="#">MFB-3300CH</a>	33.00	26.00-40.00	1.50	EAR99
<a href="#">MFB-3325CH</a>	33.25	32.00-34.30	2.50	EAR99
<a href="#">MFB-3475CH</a>	34.75	29.95-40.00	2.00	EAR99
◆ <a href="#">MFBP-00050CH*</a>	34.80	33.80-35.90	2.93	EAR99
<a href="#">MFB-3450CH</a>	35.00	24.00-45.00	1.50	EAR99
<a href="#">MFBP-00022CH</a>	36.00	31.00-41.20	1.70	EAR99
◆ <a href="#">MFBP-00047CH*</a>	37.25	34.44-40.20	2.04	EAR99
◆ <a href="#">MFBP-00057CH*</a>	37.50	30.50-46.20	1.50	EAR99
◆ <a href="#">MFBP-00051CH*</a>	38.40	36.80-40.00	2.49	EAR99
<a href="#">MFBC-00017CH</a>	42.00	34.50-49.50	1.50	EAR99
<a href="#">MFBC-00008CH</a>	44.50	36.70-51.10	1.50	EAR99
<a href="#">MFB-5350CH</a>	53.50	40.00-67.00	1.20	EAR99
<a href="#">MFBC-00018CH</a>	53.75	44.50-62.50	2.00	EAR99
<a href="#">MFBC-00009CH</a>	55.60	46.50-63.50	1.60	EAR99
<a href="#">MFBC-00019CH</a>	70.00	58.30-77.70	2.85	EAR99
<a href="#">MFBC-00020CH</a>	93.50	77.35-107.80	3.60	EAR99

**IQ MIXERS**

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	Image Rej (dBc)	L-R Isolation (dB)	ECCN
MMIQ-0218(L/H)CH	2-18	DC-3	8/7.5	27/35	58/53	EAR99
MMIQ-0416(L/H)CH	4-16	DC-6	9	28/29	58/59	EAR99
MMIQ-0520(L/H)CH	5-20	DC-6	9	35	46	EAR99
MMIQ-0626(L/H)CH	6-26	DC-6	9	35	41	EAR99
<a href="#">MMIQ-1037HCH</a>	10-37	DC-12	9	25	47	EAR99
MMIQ-1040(L/S)CH	10-40	DC-12	9	25	47/44	EAR99
MMIQ-1865(L/H/S)CH	18-65	DC-23	9	35	49/48/50	EAR99
MMIQ-40100(L/H)CH	40-100	DC-20	10	30	see datasheet	EAR99
<a href="#">MMIQ-30120HCH<sup>1</sup></a>	30-120	DC-30	8.5	27	40	EAR99

<sup>1</sup>Differential IF IQ Mixer**MIXERS, Double Balanced**

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	IIP3 (dBm)	LO Drive (dBm)	ECCN
<a href="#">MM1-0115HCH</a>	1-15	DC-2.5	7.5	+21	+17	EAR99
MM1-0212(L/H/S)CH	2-12	DC-3	8/8.5/8.5	+13/+23/+26	+9/+15/+20	EAR99
MM1-0222(L/H)CH	2-22	DC-3.5	8.5	+12/+20	+9/+15	EAR99
MM1-0312(H/S)CH	3-12	DC-4.5	7.5	+19/+24	+15/+20	EAR99
MM1-0320(L/H)CH	3-20	DC-4	8	+10/+20	+7/+15	EAR99
MM1-0330(H/T)CH	3-30	DC-5	7/9	+21/+32	+19/+23	EAR99
<a href="#">MM1-0424SCH</a>	4.5-24	DC-4	8	+25	+20	EAR99
MM1-0626(H/S)CH	6-26.5	DC-9	7.5/8	+21/+25	+15/+20	EAR99
MM1-0832(L/H)CH	8-32	DC-12	8/7.5	+14/+23	+9/+15	EAR99
MM1-1044(L/H)CH	10-44	DC-14	7.5	+13/+22	+9/+15	EAR99
<a href="#">MM1-1140HCH</a>	11-40	DC-12	8	+21	+15	EAR99
<a href="#">MM1-1240SCH</a>	12-40	DC-12	8	+25	+20	EAR99
MM1-1467(L/H)CH	14-67	DC-21	7	+12/+18	+13/+15	EAR99
MM1-1850(H/S)CH	18-50	DC-20	8/8.5	+21/+25	+15/+20	EAR99
MM1-1857(L/H)CH	18-57	DC-21	8/7.5	+13/+20	+9/+13	EAR99
<a href="#">MM1-2567LCH</a>	25-67	DC-30	9	+9	+13	EAR99
<a href="#">MM1-30100LCH</a>	30-100	DC-20	8.5	see datasheet	+14	EAR99
<a href="#">MM1-35130HCH</a>	35-130	DC-50	8	see datasheet	+12	EAR99
<a href="#">MMH-35120HCH<sup>1</sup></a>	35-120, 12-40	DC-14	18	+7	+15	3A001.b.7.c.1

<sup>1</sup>Harmonic Mixer**MIXERS, Triple Balanced**

Part Number	RF/LO (GHz)	IF (GHz)	Conversion Loss (dB)	IIP3 (dBm)	LO Drive (dBm)	ECCN
MM2-0530(L/H)CH	5-30	2-20	10/9	+19/+28	+15/+20	EAR99
<a href="#">MT3A-0113HCH<sup>1</sup></a>	1-13	0.5-8.5	8.5	+28	+8	EAR99
<a href="#">MT3L-0113HCH</a>	1.5-13	0.25-5	8.5	+31	+20	EAR99
MT3H-0113(L/H)CH	1.5-13	0.8-8.5	8/8.5	+20/+28	+15/+20	EAR99

<sup>1</sup>Integrated low phase noise driver amplifier**\*New Release**

All electrical specifications given are typical values.

**HYBRIDS, 90° Quadrature**

Part Number	Band (GHz)	Amplitude Balance (dB)	Phase Balance (°)	Isolation (dB)	ECCN
<a href="#">MQS-0209CH</a>	2-9	±0.5	±3	16	EAR99
<a href="#">MQS-0218CH</a>	2-18	±1	±3	17	EAR99
<a href="#">MQH-2R58R5CH</a>	2.5-8.5	±0.4	±3	23	EAR99
<a href="#">MQH-3R510CH</a>	3.5-10	±0.4	±1.5	25	EAR99
<a href="#">MQS-0418CH</a>	4-18	±0.4	±0.5	20	EAR99
<a href="#">MQH-0517CH</a>	5-17	±0.5	±6	23	EAR99
<a href="#">MQH-0920CH</a>	9-20	±0.55	±2	21.5	EAR99
<a href="#">MQH-1434CH</a>	14-34	±0.7	±4.5	17	EAR99
<a href="#">MQH-1842CH</a>	18-42	±1.5	±4	15	EAR99

**LIMITERS**

Part Number	Band (GHz)	Loss (dB)	Flat Leakage (dBm)	Average Power Handling (W)	Peak Power Handling (W)	P1dB (dBm)	ECCN
<a href="#">◆ HLM-100001CH*¹</a>	DC-10	0.8	+8.5@10GHz	10	—	+11	EAR99
<a href="#">HLM-8011CH¹</a>	DC-30	0.4	+7@30GHz	1	4.5	+10	EAR99
<a href="#">HLM-40CH¹</a>	DC-40	0.5	+16@20GHz	4	20	+15	EAR99
<a href="#">HLM-70CH¹</a>	DC-70	0.8	+9@40GHz	4	20	+9	EAR99

\*¹Power ratings are dependent on frequency, temperature, and pulse conditions

**PASSIVE MULTIPLIERS & NON LINEAR TRANSMISSION LINES**

Part Number	Type	Input (GHz)	Output (GHz)	1F Supp (dBc)	3F Supp (dBc)	ECCN
<a href="#">MMD-0415HCH</a>	Doubler	2-7.5	4-15	27	36	EAR99
<a href="#">MMD-1030(L/H)CH</a>	Doubler	5-15	10-30	38/41	46/47	EAR99
<a href="#">MMD-1250HCH</a>	Doubler	6-25	12-50	32	40	EAR99
<a href="#">MMD-1648LCH</a>	Doubler	8-24	16-48	44	69	EAR99
<a href="#">MMD-2060(L/H)CH</a>	Doubler	10-30	20-60	37/38	41/40	EAR99
<a href="#">MMD-3580LCH</a>	Doubler	17.5-40	35-80	38	44	EAR99
<a href="#">MMD-20100HCH</a>	Doubler	10-50	20-100	24.5	33	3A001.b.7.b.1
<a href="#">MMD-40120HCH</a>	Doubler	20-60	40-120	30	40	3A001.b.7.b.1
<a href="#">MMQ-40125HCH</a>	Quadrupler	10-31.25	40-125	19	12	3A001.b.7.b.1
<a href="#">NLTL-6273CH</a>	Comb Generator	0.7-5	0.7-40	—	—	EAR99
<a href="#">NLTL-6275CH</a>	Comb Generator	3-15	3-85	—	—	EAR99

**POWER DIVIDERS, 1:2**

Part Number	Band (GHz)	Amplitude Balance (dB)	Phase Balance (dB)	Isolation (dB)	ECCN
<a href="#">MPD-0226CH</a>	2-26.5	±0.2	±2	20	EAR99

\*New Release

All electrical specifications given are typical values.

# MARKI MICROWAVE PART NUMBER DECODER RING

Example: MT3H-0113LCQG-2

Prefix=MT3H, Identifier=0113, Diode=L, Package=CQG, Suffix=-2

## PREFIX

1 to 4 letters to identify the product category (**BAL**=balun, **PD**=power divider, etc)

- MMICs: M prefix (ex: **MBAL**, **MM1**, **MT3**)
- Modifiers: ex: **MT3A** Integrated LO Driver Amplifier
- **EVAL**, **EVB**: evaluation boards of SMT components (ex: **EVAL-MM1-0212H**)

## IDENTIFIER

Most part numbers include a 4-digit string that identifies start/stop frequencies (ex: **0416** = 4 to 16 GHz), with a few exceptions:

- Exceptions: amplifiers and NLTLs have the chip number instead of frequency band

## DIODE

Found on mixers, IQ mixers and multipliers. LO Drive is given at typical value.

- **L** diode: Vf=0.25V, LO Drive +5 to +15 dBm
- **H** diode: Vf=0.75V, LO Drive +11 to +20 dBm
- **S** diode: Vf=1.4V, LO Drive +17 to +23 dBm
- **T** diode: Vf=2V, LO Drive +20 to +27 dBm

## PACKAGES

- MMIC SMTs: **SM** (surface mount), **PSM** (plastic substrate), **CSM** (ceramic substrate), **CSP1**, **CSP2**, **CSP3** (chip scale package), **LGA** (land grid array) or **CH** (chip/bare die)
- Hybrid surface mounts: **CTG**, **CQG**, **SM**, **SMG**, **SLG**, **SSG**, etc
- Connectorized
  - Sub-30GHz MMIC: typically **S**
  - mmWave modules: **M**, **M2**, **U**, **UA**, **UB**, **UC**, etc
- Evaluation boards: **EVAL**, **EVB**

## LAYOUT CONFIGURATION

- Mixers are generally offered in **-2** layout, but some are offered in a mirrored layout **-1** (ex: **MM1-1467LCH-1** and **MM1-1467LCH-2**)

**CONNECTOR OPTIONS:** swaps are available upon request

- SMA
- 2.92 mm
- 2.4 mm
- 1.85 mm
- 1 mm

## WAVEGUIDE DECODER

Prefix: ADA = Active Doubler, AQA = Active Quadrupler, ASA = Active times Six

ADA-xxX00WG:

- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)
- Identifier: **X** 1-digit string identifying : **F** = Full band **N**= Narrow band

Prefix: ATN identifies Attenuator product family

ATNXX-xxFX00WG:

- **XX** is a 2-digit string identifying the attenuation value
- Identifier: **xx** 2-digit string identifying the frequency band of operation. (ex: 10 = WR-10)
- **FX** identifies Fixed Attenuator, **X** = **L** for Low and **H** for High power; **LS** identifies Level Set Attenuator

Prefix: C identifies Coupler product family

CXX-xx00WG:

- **XX** identifier is coupling value (ex: 10, 20, 30 or 40 dB)
- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)

Prefix: DET identifies Detector product family

DET-xxPP00WG:

- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)
- Output: SMA Female
- **PP** Identifier is Polarity: Positive

Prefix: ISO identifies Isolator product family

ISO27-xxF00WG:

- **XX** identifies isolation value (ex: 27 dB)
- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)

Prefix: PD identifies Power Divider product family

PD20-xx00WG:

- **XX** = Output to Output isolation value. (ex: 20 dB)
- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)

Prefix: TW identifies Termination product family

TW50-xxX00WG:

- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)
- Identifier **X** = **H** for high Power, **L** for Low Power
- Connector options: UG-387, UG-385, UG-383 and UG-599

Prefix: WE identifies Waveguide E plane bend product family

WEXX-xx00WG:

- Identifier: **XX** 2-digit string identifying bend degree (45 or 90 Degrees)
- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)

Prefix: WH identifies Waveguide H plane bend product family

WHXX-xx00WG:

- Identifier: **XX** 2-digit string identifying bend degree (45 or 90 Degrees)
- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)

Prefix: WS identifies Waveguide Straight product family

WS-xx00XXXWG:

- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)
- Identifier: **XXX** 3-digit string identifying length in inches (ex: 3 inches=300)
- Identifier: **XXX** the last X in string will identify if the flange is Square (**S**) or Round (**R**)

Prefix: WT identifies Waveguide Twist product family

WTXX-xxX00WG:

- Identifier: **XX** 2-digit string identifying bend degree (45 or 90 Degrees)
- Identifier: **xx** 2-digit string identifying the frequency band of operation (ex: 10 = WR-10)
- Identifier: **X** 1-digit string identifying **L** for left and **R** for right hand twist

# PERFORMANCE THAT SEEKS UNREAL



## Introducing Prodigy™ Filter Designer

*Go from Ordinary to Extraordinary RF/Microwave Development*

RF systems have unique frequency plans and utilize RF filters to select bands of interest and reject unwanted signals. This often drives the need for custom filters and an iterative system optimization process, resulting in costly engineering time and longer design cycles.

**Generate instantaneous 3D FEM quality MMIC filter designs with Prodigy™, the new automated filter design tool from Marki Microwave.** Powered by advanced FEM modeling and machine learning techniques, Prodigy puts MMIC filter design into the customer's hands.



- ◆ Generate accurate, custom MMIC filter designs with instant access to s2p files
- ◆ Enables fast, iterative system optimization
- ◆ Cost-effective & streamlined delivery of products

**START DESIGNING AT**

[www.markimicrowave.com/technical-resources/tools/filter-prodigy](http://www.markimicrowave.com/technical-resources/tools/filter-prodigy)



# MARKI MICROWAVE

is proud to provide world-class support including direct access to engineers, downloadable device models for ADS®, SystemVue®, Microwave Office®, Modelithics®, Quantic X-Microwave®; and evaluation modules for our MMIC bare die and surface mount products.

## Online Tech Support:

- Extensive Knowledge Base with Tech Notes
- Application Notes
- Detailed White Papers
- Prodigy™ Filter Designer, RF Design Tools, Calculators and Converters
- Email us at [support@markimicrowave.com](mailto:support@markimicrowave.com)

Visit [markimicrowave.com](http://markimicrowave.com) for more waveguide, connectorized, SMT and bare die components.

## CONTACT INFORMATION

Headquarters:  
345 Digital Drive  
Morgan Hill, CA 95037

San Diego Office:  
12626 High Bluff Drive  
Suite 120  
San Diego, CA 92130

Sales: 408-778-9952

Sales & Customer Support: [sales@markimicrowave.com](mailto:sales@markimicrowave.com)

Tech Support: [support@markimicrowave.com](mailto:support@markimicrowave.com)

General: 408-778-4200

Fax: 408-778-4300



You can also view the Marki Microwave range of components on the  
APC Technology Group website.

We provide access to datasheets and our experienced RF and Microwave team are available to provide  
dedicated technical support and guidance.

[www.apctech.com](http://www.apctech.com)  
0330 313 3220 | [rf@apctech.com](mailto:rf@apctech.com)



**USA** DESIGNED  
MANUFACTURED  
SUPPORTED

Copyright © 05/2024 Marki Microwave, Inc. All Rights Reserved.